

#### **Contents**

UNDERSTANDING THE RESIDENTIAL DESIGN STANDARDS & GUIDELINES	MANDATORY COMPLIANCE ELEMENTS			OPTIONAL/RECOMMENDED ELEMENTS	• • • • • •
Residential Design Standards and Guidelines 3  How the Residential Design Standards and Guidelines Work 4  Building @ Everleigh Portal 5	Part 1 Design & Siting Standards8 Approved Plan of Development — Envelope Plan and Design Criteria8	Part 2 Architectural and Landscape Design Standards Minimum Building Size Roofs Façade Design External Wall Materials and Colours	<b>10</b> 10 10	Part 3 Sustainable Living Guidelines Objectives Energy Consumption and Greenhouse gas-emission reduction Water Conservation and reuse Materials and Waste	1 1
The Approval Process 6		Driveways & Entry Paths	1112121212121214	Smart Technology	1
Definitions20	Annexure A Approved PoD – Envelope Plan 23 Annexure B Approved PoD – Design Criteria 29	Annexure C Fence Types	37	Annexure D Landscape Design Guidelines	4
	•••••	••••	•••••	••••	

# Residential Design Standards and Guidelines

These standards and guidelines have been prepared to assist Everleigh purchasers (and their builders/designers) to construct well designed, quality homes and to join Mirvac in creating great places for life.

The standards and guidelines are intended to help you add value to your home and protect your investment by creating an attractive streetscape. Great design creates a welcoming and attractive streetscape.

This not only improves your quality of life but establishes Everleigh as a great place to live and a place in which you will be proud to be a part of.



#### Street Appeal

These standards and guidelines will assist in making your home part of an attractive streetscape. This is achieved by using the right materials and colours and including some cost effective design elements to the front façade.



#### Fencing

Fences which are visible from the street are an important part of the streetscape. So at Everleigh we ask that these are of a higher standard and quality but for most lots this is only a short length and the balance of the fencing can be the neighbour type fence.



#### Landscaping

A great way to make your home unique is through landscaping. We ask that you include landscaping that will grow into an attractive low maintenance front yard that complements the parks and bushland that are a great part of Everleigh. This document provides design standards to ensure that cohesive and attractive landscaping is established.

### How the Residential Design Standards and Guidelines Work

#### The Everleigh Residential Design Standards and Guidelines (Design Standards & Guidelines) sets out:

- Standards which are mandatory compliance elements; and
- Guidelines which are non-mandatory elements that provide further information and suggestions to improve design and quality of life.

The Design Standards and Guidelines are technical in nature and it is recommended that you speak to your builder or an Everleigh sales team representative who will be able to guide you through this process.

#### The Design Standards and Guidelines consists of three parts as follows:



#### AUTHORITY REQUIREMENTS

#### Design and Siting Standards

Directs customers to the Approved Plan of Development — Envelope Plan and Design Criteria documents which include the **mandatory design standards for siting your home** to the specific characteristics of your lot. These documents are available in Annexure A and B.



#### MIRVAC REQUIREMENTS

#### Architectural and Landscape Standards

Provides the mandatory architectural and landscape design standards to include in all homes in Everleigh which are essential to making Everleigh a place in which you will be proud to live.



#### GOOD PRACTICE

#### Sustainable Living Guidelines

Provides **suggestions** to introduce some easy ways to potentially reduce your future ongoing costs and the impact on the environment.

Alternative design solutions may be presented to the Everleigh Design Committee and will be assessed on individual architectural merit. The Design Committee at its absolute discretion may approve alternative design solutions where it is considered that they achieve the overall intent and desired outcomes of the Design Standards & Guidelines.

## Building a EverleighPortal

We understand that keeping track of all this information can be a challenge and have established a web portal to assist.

The **Building @ Everleigh Portal** is a one stop shop for information relating to your lot, including but not limited to the following:

- · Residential Design Standards & Guidelines
- Fact Sheets and Manuals
- Approved Plan of Development Envelope Plan
- Approved Plan of Development Design Criteria
- Survey Plans
- Disclosure Plans
- · Civil Design Drawings
- Services Location Plan
- As Constructed Drawings
- Compaction Reports
- Acoustic Report
- Bushfire Management Plans

The information available in the **Building @ Everleigh Portal** will help you and your builder make informed decisions regarding the design of your home.

The **Building @ Everleigh Portal** is accessible via the Everleigh website or speak to an Everleigh sales representative.



# The Approval Process

You will need both the Design Approval from the Everleigh Design Committee (Design Committee) and Building Approval from Logan City Council (Council)/building certifier before you can commence construction.

Mirvac has developed a streamlined process based on previous experience to ensure that you can start building your home and garden as soon as possible.



The Design Committee often receive an influx of applications at the time of settlement. To avoid any potentia delays to starting the build on your lot, we recommend that your builder submits your application as early as possible to give you a head start on the assessment process.

#### YOUR STEPS



It may seem daunting but often your builder has plenty of experience with this process.



Please ensure that your builder attaches all the required documentation listed in the Covenant Application Form as part of the submission.



Be sure to include the proof of bond payment as part of your covenant application to avoid a delay in the assessment and approval process. The bond will be returned after the final inspection (refer Step 9).

#### Design

Your builder will work with you to design your home to comply with this document.

Proceed to Step 2 once you're happy with your design and your builder has drawn up the consolidated set of plans.

#### Submission

Your builder submits your house plans, colour schedules, landscape plans and proof of covenant payment (refer to Step 3) to the Design Committee via the Building @ Everleigh Portal.

#### Covenant Bond Payment

Your fully refundable **Covenant Bond** is required to be deposited to the following account to be held in trust.

**HWL Ebsworth Lawyers Law Practice Trust Account**BSB: **034-003** Acc Number: **246634**Description: "Surname & Lot Number" — Covenant Bond

Amount: **\$1000** 

STE



STEP 4

#### Assessment

The Design Committee will assess your submission for compliance with the Design Standards & Guidelines. During this process we will work with you and your builder if anything needs amendment. In some cases, plans may need to be resubmitted. This process normally takes 2 weeks if all information is provided.

OUR STEPS

#### Building Approval

Once Design Committee approval has been issued, your builder can then make an application to your accredited building certifier/ Council for the **statutory Building Approval.** 

#### Construction

Please ensure that your lot is properly maintained to be free of excessive weeds, rubbish or garbage prior to and during the construction phase of your home. This will ensure that the land is safe at all times.

#### Call for Inspection

Once your house and landscaping is complete, please touch base with us via the Building @ Everleigh Portal to organise your final inspection.

#### Design Approval

The Design Committee will issue an approval when your submission has been assessed as complying with the Design Standards & Guidelines. Your stamped approved plans will be provided to you and your builder via the Building @ Everleigh Portal.



STEP

#### Inspection & Refund

The covenant bond will then be refunded once final compliance approval is issued by the Design Committee and the return **bond form** is completed on the Building @ Everleigh Portal.



Please take care to note any comments on your Everleigh Design Committee stamped approved plans to ensure that all conditions of the Design Committee approval are addressed.



## Design & Siting Standards

Approved Plan of Development — Envelope Plan and Design Criteria

We recommend that you speak with your builder or an Everleigh Sales Team representative who will be able to guide you through the Approved Plan of Development – Envelope Plan and the Approved Plan of Development – Design Criteria (PoD documents) and how these relate to your specific lot.

The Approved PoD documents are available in Annexure A and B.


The Design and Siting Standards (Part 1) which includes the approved PoD documents should also be read with the Architectural and Landscape Design Standards (Part 2).

Where compliance with any particular design standard in Part 2 results in non-compliance with Part 1, then the design standard for Part 1 takes precedence. In all other instances, the design standards in Part 2 take precedence.

Provided overleaf is a simple flow chart with instructions on how to navigate the PoD documents should you wish to review and understand these provisions yourself.



Figure A Instructions to navigate the Approved Plan of Development Documents

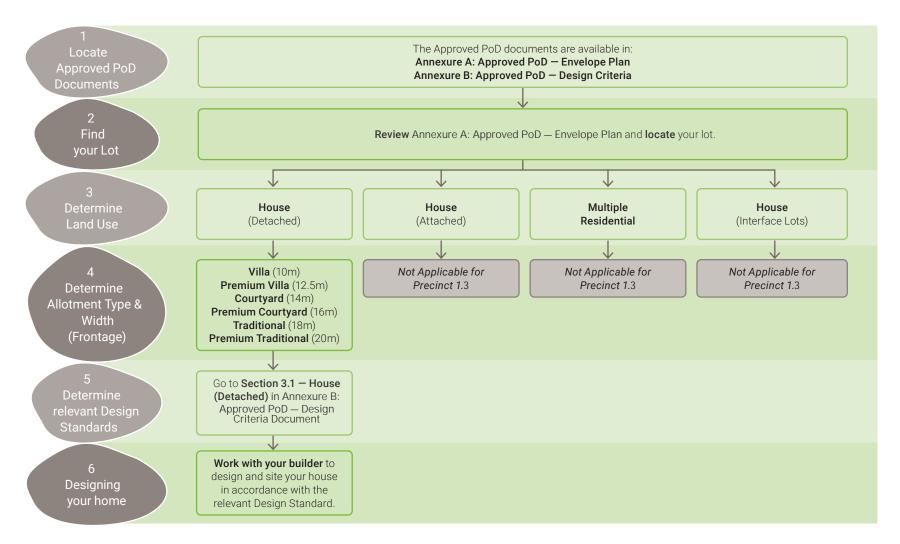





## Architectural and Landscape Design Standards

#### MINIMUM BUILDING SIZE

 For lots with only one street frontage, the minimum width of your home is 75% of the primary street frontage width, measured to the outside of walls.

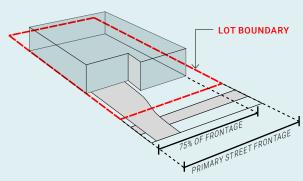

 For corner lots the minimum width and length is 65% of the respective frontage.

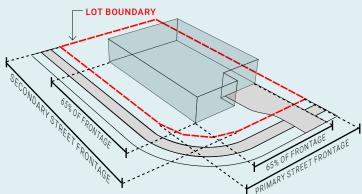

#### **ROOFS**

- 40 degrees is the maximum pitch for traditional hip and gable roofs.
- Skillion roofs should be proportional to the main body of the home and roof pitches should generally be between 7.5 – 15 degrees.



- All single storey houses are to have a minimum of 450mm eaves to all publicly visible façades.
- All double storey houses are to have a minimum of 450mm eaves to all publicly visible façades on ground level, and a minimum of 450mm eaves must be provided to all elevations on the upper storey. Variations on this (e.g. inclusion of a parapet) may be approved on merit if it achieves a positive addition to the façade of your home.
- · Your roof materials are limited to:
  - Corrugated pre-finished metal sheets (e.g. Colorbond).
  - Roof Tiles.
  - Your roof colour must be of a muted / earthy tone (refer to colour palette below for guidance). Harsh colours such as blue, red and black are not permitted.

#### Colorbond references:





#### **FAÇADE DESIGN**

#### Primary Street Façade Design

- · The residential character of your home must be of a contemporary architectural aesthetic or design. It should reflect the characteristics of Everleigh, embracing the natural bushlands and open spaces, with sympathetic colour tones and material palette. No federation or colonial design elements should be included in the design.
- · The façade must have variation in the elevation with at least one substantial projecting feature element such as a portico, verandah or feature wall.
- · Any entrance portico must be proportional to the façade of the building and is to be a minimum of 4m<sup>2</sup> (including eave overhangs) and 1.5m deep.
- · At least 1 habitable room must address the primary street frontage.
- FRONT DOOR MINIMUM 1.2m WIDTH MINIMUM 1.5m DEEP **ENTRANCE PORTICO** MINIMUM 4m<sup>2</sup> AREA **LOT BOUNDARY** MINIMUM ENTRY WIDTH OF 1.2m


- · Similar homes with similar façades are not allowed on adjoining lots.
- · Obscure windows or windows to toilets and bathrooms should not front the primary street, unless aesthetically screened.
- · Walls over 9m in length without windows or articulation are not permitted.
- · No garden sheds, air conditioning condensers or clothes lines, etc. can be located between the primary street façade and boundary.

#### Front Entry Door

- · Your home's front door must be well defined and/or visible from the primary street.
- · The entry door must be:
  - nominal 1200mm wide with minimum 20% glazing; or
- nominal 1000mm wide combined with a minimum 200mm wide sidelight
- · Other combinations may be approved on merit if they achieve a positive addition to the façade of your home.

#### Garages

- · Minimum two car (side by side) internal garage must be provided for lots with frontages of 12.5m or greater.
- · Garages must be integrated into the main building and are to be setback 1m behind the front wall of the main building.

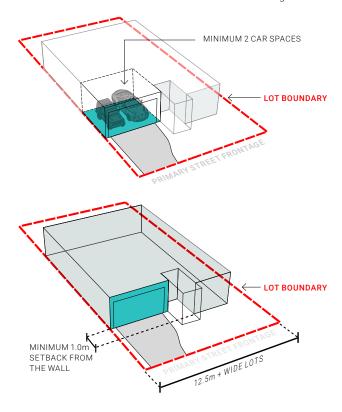



For more information, please visit the **Building @ Everleigh Portal**.

#### Secondary Street Façade Design

- If your home is on a corner lot, it must be designed to address all streets.
- It must have variation in the secondary street façade with at least one substantial projecting feature element such as a portico, verandah or feature wall.
- Walls over 9m in length without windows or articulation are not permitted.
- At least 1 habitable room should address the secondary street frontage.
- No garden sheds, air conditioning condensers or clothes lines, etc. can be located between the secondary street façade and boundary unless they are screened from view from a Public Area by approved screens or fences.

#### Glazing to Public Areas

- All façades (excluding the garage door) are to include glazing for a minimum 10% of the façade area to provide surveillance, interest and variation.
- Sliding windows under 1200mm width are not permitted.
- · Reflective glass is not permitted.
- Temporary window treatments or vertical blinds are not permitted.

#### LETTER BOXES

- The letter box must be complementary to the modern aesthetics of the primary building and be constructed using materials such as stone and masonry.
- The letter box must be installed prior to the occupation of the main building.

#### EXTERNAL WALL MATERIALS AND COLOURS

- To give a sense of variety and interest, a mix of materials or colours must be used to all walls of your home facing a street or park frontage.
- A minimum of 2 and a maximum of 3 variations of colour and/ or materials (excluding windows, doors and garage doors) must be incorporated.
- Colour and/or material change should comprise a minimum 10% of façade wall area.

#### **External Wall Materials**

- Face brickwork or split-face block work is not permitted on primary street, secondary street or public open space façades except as a limited feature only.
- Finishes to the Primary Street and or Secondary Street
  Facade must return back around the other walls and extend
  back 1m or wherever the side fence meets the house,
  whichever is the greater.
- Finishes to any non-feature masonry on primary street and secondary street façade must be solid render not 'bag and painting'.
- Double or 1.5 height face brick is not permitted anywhere.
- Finishes to any non-feature masonry on public open space façades may be 'bag and painting' and the finish used on this façade must also be used on the adjoining side and/or rear walls.
- Second hand materials are not permitted unless they are used as highlight architectural elements.

#### **External Wall Colours**

- Your colour scheme must be primarily muted tones, but limited and controlled feature highlight colours may be approved.
- Each application is to be accompanied by an External Colour Schedule clearly nominating the location and extent of colours and materials.

#### **DRIVEWAYS & ENTRY PATHS**

- Acceptable materials for your driveway include coloured concrete, exposed aggregate concrete and pavers on a concrete base slab. Stencil or painted finish are also accepted. These must compliment the external colour scheme of your home.
- The main pedestrian entry path to your home must be from the primary street frontage and must be constructed from a permanent hard surface such as coloured concrete, exposed aggregate, natural stone or concrete pavers on a concrete base. Pebble or decorative gravel are not permitted as materials for the main entry path to your home.
- Side paths must be constructed from similar materials to the main entry path or decorative gravel on compacted road base. Material selection must reflect and integrate with the surrounding landscape.
- It is important that you ensure your builder complies with Council's approval requirements for your driveway as Council may require you to remove it and reconstruct it if it is not constructed correctly.

#### PRIVACY AND CROSS VIEWING

Privacy between your home and your neighbours' homes is to be achieved by one or more of the following measures:

- · Obscure glazing to all bathrooms and toilets.
- 1.7m high sill levels above floor level.
- External screens
- 1.8m high dividing fence for ground floor windows.
- Where a direct view from a verandah or deck exists into the Private Open Space of an adjoining home, the outlook must be screened by privacy screens that have openings that make it not more than 25% transparent.

#### SECURITY AND INSECT SCREENS

- The style of any screen visible from a Public Area must be of a simple profile. Hexagonal, diamond grill or ornate historical styles are not permitted.
- Frames and screens must match the colour of the door or window frames or be dark grey or black in order to reduce their visual impact.
- Security shutters or security blinds over windows are not permitted if visible from a Public Area.

#### EXTERNAL SERVICES AND WASTE RECYCLING

- If you have a rainwater tank it must be located away from or screened from view from all Public Areas.
- · Meter boxes must be painted to match the wall colour.
- TV aerials are to be installed inside the roof cavity or designed and located so that they are not visible from Public Areas
- Radio masts or satellite dishes are to be designed and located so that they are not visible from Public Areas.
- Storage tanks for solar hot water systems, roof and wall mounted air conditioning units, clothes drying facilities and service yards are not to be visible from Public Areas.
- Garbage bin pads are mandatory and are to be located so that they are not visible from Public Areas.

#### **CONSTRUCTION OBLIGATIONS**

- · Your building site must be clean and safe at all times.
- Your builder must provide a skip bin or enclosure on site to contain rubbish for the duration of the construction period.
- Bins and site facilities must be clear of all neighbouring properties, roads, footpaths, reserves and all other Public Areas at all times.

#### **DEVELOPER WORKS**


- Where the Developer has constructed a fence, entry statement or retaining wall, it is to be maintained by the owner to the standard to which it was constructed.
- The road and verge in front of your lot including the
  concrete footpath and services such as water meters,
  telecommunication boxes, street trees, stormwater drains,
  manholes, and electrical pillars are assets owned by Council
  or service authorities. They have been constructed to the
  required standards and Council and other service authorities
  have recorded them as correctly constructed prior to your
  house building commencing.
- These assets cannot be altered, including changing the ground levels, without the correct approval from Council.
   Mirvac inspects these assets at completion of your home to ensure no damage. Any damage caused during construction of a dwelling to any estate infrastructure (e.g. kerbs, grassed verges, street trees, bollards, etc.) is to be repaired by the owner to the standard to which it was constructed.



Make sure that any damage to these assets are repaired before the final inspection. This will avoid a delay in refunding your covenant bond.

#### **LANDSCAPING**

- The landscaping to areas of your lot visible from Public Areas must be approved by the Design Committee.
- The planting theme to be adopted is generally of a native character. All trees, shrubs, and ground covers must be selected for their appropriateness according to their proposed situation.
- Planted garden beds must be provided to a minimum of 50% of the available soft landscaping area forward of the building line on the primary street frontage and 20% of the available soft landscaping area forward of the building line on the secondary street frontage (if applicable), with high quality turf installed to the remainder of soft landscaping areas.
- Generally, a 50/50 ratio of shrubs to ground covers will establish suitable variety and form.
- A minimum of two advanced trees (minimum size of 45L stock and 1.8m tall at the time of planting) must be provided to the landscape areas between your house and the verge.
- Gardens are to be edged with concrete, galvanized steel, masonry or rectangular shaped treated timber, but not round timber, logs or plastic edging.
- Garden edges with a height exceeding 200mm are considered to be a retaining wall, therefore must be constructed according to the design requirements of a retaining wall.

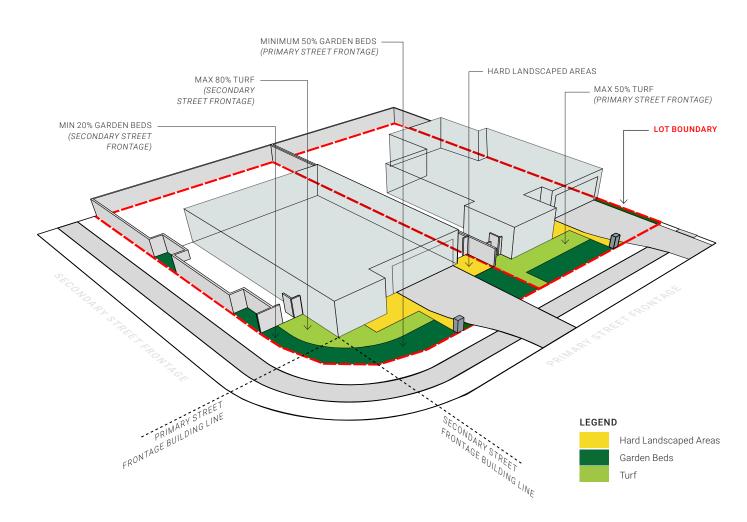




For more information, please visit the **Building @ Everleigh Portal**.

#### **Retaining Walls**

- A retaining wall is defined as any retaining structure higher than 200mm.
- All retaining walls must be constructed as part of the construction of your home.
- Retaining walls must be tiered 1m vertical and 1m horizontal
  where forward of the building line to any street, park or lane
  and visible from Public Areas and must be constructed
  to match the developer's specification or materials such
  as stone, masonry, steel or quality hardwood timber. The
  horizontal section is to comprise a planting zone to soften the
  visual impact of the retaining wall.



For sloping lots and where a built to boundary wall is permitted, this wall must be projected to at least 150mm below the likely pad level of the adjacent block. The pad level can be assumed to be the average of the four corners of the adjacent block using the As Built levels. The build down of the build to boundary wall must be in a material consistent with the visible section of the wall immediately above it.

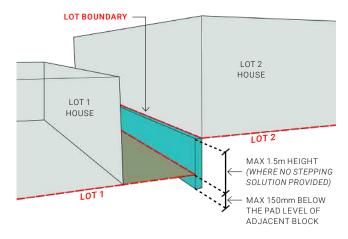

- Retaining wall construction must include a suitable drainage system to deliver sub-surface water below the wall to the local storm water system.
- Retaining walls may need to be certified by a Registered Professional Engineer. You are required to meet the Local Authorities requirements with regard to this matter.

#### Sheds

- Must be located behind the front building line and screened from view from a Public Area.
- Must be painted or stained to suit the colour scheme of the home. Reflective materials are not permitted.
- · Must be less than 12m2.
- · Must be less than 2.1m in height.

#### **FENCES GENERAL**

- All fences to your lot must be approved by the Design Committee.
- Only fence types shown in Annexure C are allowed. No other materials such as bamboo or colorbond are allowed.
- Fences constructed by Mirvac on any lots cannot be removed or altered without written permission from Mirvac. Any damage to these fences must be repaired to the original standard by the land owner(s).
- Fences visible from Public Areas must be maintained on an ongoing basis including recoating with timber treatment if detailed as part of the fence type.
- · All lots are required to have side & back fences.
- Fences are not permitted along road frontages forward of the building line.

#### Fencing facing the Primary Street

- · Must be Feature Fence Type A or B.
- · Maximum 1.8m in height.
- Must be located a minimum of 1m behind the adjoining front façade wall.

#### Fencing facing the Secondary Street or Pedestrian Links


- Must be Feature Fence Type A or B.
- · Maximum 1.8m in height.
- Must not extend past the façade line of the other street frontage.
- Fences more than 10m in length must be articulated further from the boundary, to allow for planting alcoves, by a minimum 1m alignment variation over a minimum length of 3m.
- Appropriate landscaping must be included within the planting alcoves.

#### Fencing to Side and Rear Boundaries Not on a Public Open Space Boundary


- Must be a Neighbour Fence Type 1 (except as detailed below).
- · Maximum 1.8m in height.
- · Must not be visible from Public Areas.
- The portion of the side or rear fence which protrudes forward
  of the fence facing the Primary or secondary street must not
  extend past the adjoining front façade wall and must be the
  same type as the Primary or secondary street fence.

#### Fencing to Public Open Space Boundaries

- Must be Feature Fence Type A or B.
- Maximum 1.8m in height.
- Where fencing is required to the top of retaining walls on a street or public open space boundary and where the combined height will be greater than 1.8m then the fence must be tiered / setback 1m from the back of the retaining wall to allow for planting in front of the fence to soften the visual impact.

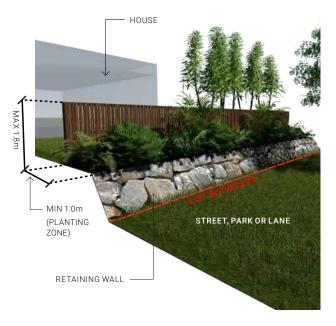



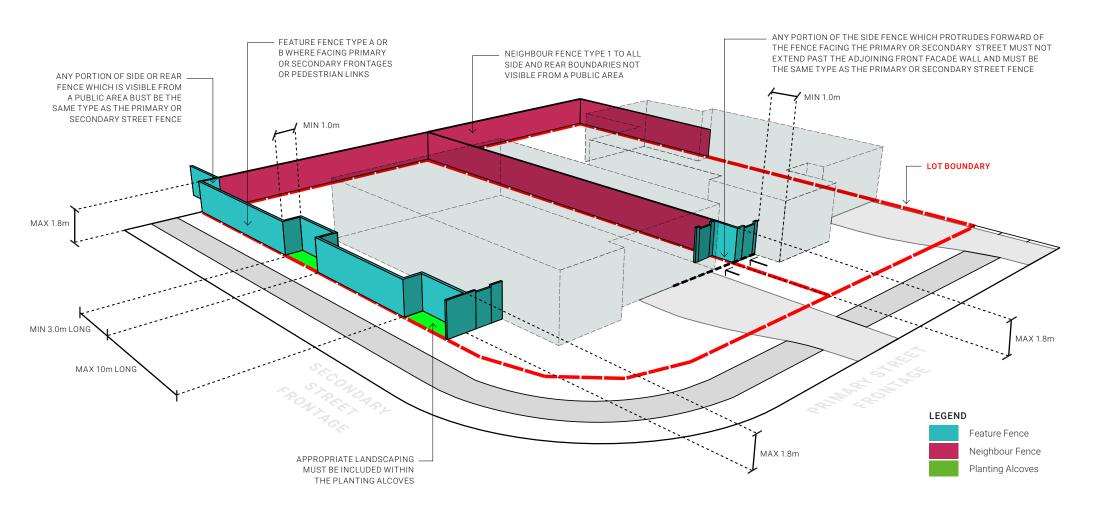



## Sustainable Living Guidelines

Mirvac considers sustainability and innovation to be key components in delivering cohesive communities that are safe, encourage healthy and active lifestyles and result in lower household expenses.

#### **Objectives**

- To set a new benchmark for high-quality sustainable living, and encourage the incorporation of best practice sustainable initiatives
- To provide and encourage opportunities for residents to reduce their environmental impact
- To provide and encourage opportunities for residents to reduce household expenses during operation

#### **Energy Consumption and Greenhouse gas-emission reduction**

- Mirvac encourages all homes to achieve a 7 Star NatHERS rating. This may be achieved through incorporation of the following elements where necessary —
  - Maximising opportunities for cross ventilation and provide high level operable windows in multi-level homes to allow for heat removal
  - Shading designed to restrict solar access to the living spaces in summer, whilst allowing beneficial solar access in winter.
  - Increased rating of the wall and ceiling insulation to the required specification
  - Treated glazing or double glazing where necessary
  - Draft sealing (weather seals on external doors etc.) where necessary
  - Sealed exhaust fans where necessary

- In addition to achieving a 7 Star rating on the building fabric, Mirvac encourage house designs to include the following energy saving features:
  - Gas boosted solar hot water or electric heat pump hot water systems
  - Gas or induction cook tops
  - LED light fittings throughout the home
  - Exterior lighting fitted with motion sensors
  - Low energy use appliances (aim for energy ratings greater than 4 star)
  - Energy efficient air conditioning systems (aim for a COP greater than 3)
  - Standby 'Green Switch' or Smart home automation to reduce energy whilst the home is unoccupied.
  - Solar photovoltaic electricity systems with battery storage

#### Water Conservation and reuse

- To assist in achieving an overall reduction in household water usage, Mirvac recommends that homes incorporate the following measures:
  - Rainwater tanks for toilet flushing and irrigation
  - Dishwasher and washing machines with a 4 Star or greater WELS rating
  - Tapware and toilets with a 4 Star or greater WELS rating
  - Showers with a 3 Star WELS rating
  - Purchasers are encouraged to consider water efficient landscape design, soil mix, and plant selections, with a target of a minimum of 70% of planted species to be drought tolerant

#### **Materials and Waste**

- Maximise the use of standard sizes of materials wherever possible to minimise wastage
- Mirvac recommends the use of low-impact construction materials
  - For masonry consider low impact options, such as recycled or carbon neutral bricks
  - For lightweight construction, consider the use of natural or innovative materials such as timber, structural insulated panels or Hebel for a reduced environmental impact and good thermal performance qualities.
- Internal Finishes
  - Consider the use of flooring, joinery and plasterboard that is environmentally certified by independent certification schemes such as GECA, EcoSpecifier or the Carpet Institute of Australia
  - Select high quality, durable finishes with long warranty periods

- To reduce the airborne chemicals within your home consider the following products
  - Engineered wood products, such as kitchen cabinetry and wardrobes, with low or zero formaldehyde (rated as E1 or E0)
  - Paints, adhesives and carpets rated to have low levels of volatile organic compounds (VOCs)
- To reduce waste to landfill during the operation of your home, consider
  - Installing a dual bin in the kitchen joinery to make recycling as easy as disposing of general waste
  - The use of a worm farm or composting bin to reduce food waste and provide fertiliser for your gardens.

#### **Smart Technology**

- Smart monitoring
   Consider the use of smart meters to help track your energy consumption and reduce your bills even further
- Smart home automation
   Consider the use of smart home automation to make your life easier and future proof your home.
   Systems available include:
  - Smart Security systems
  - Smart intercom and access controls
  - Smart controls of lighting, blinds, air conditioning and appliances
  - Audio Visual systems
- If solar electricity and/or batteries are installed, consider a fully electric house to avoid the need for a natural gas connection.

#### Landscaping

- The use of permeable surfaces is encouraged to maximise opportunities for natural infiltration and groundwater recharge
- The use of waterwise plant species, waterwise irrigation and mulching of garden beds is encouraged to reduce water use
- The planting of trees offering shade for the house and outdoor living areas and contributing to bird habitat is encouraged
- The use of locally native plant species is encouraged to increase biodiversity
- Consider the use of herbs, vegetables and fruit trees to create a productive garden



Please refer to Annexure D for the Landscaping Design Guidelines including concepts and a recommended planting palette which provide further information on how to achieve a high quality landscape outcome.

#### **Definitions**

#### As Constructed Site Level

The existing level of your lot as constructed during the civil works completed by or on behalf of Mirvac.

#### **Built to Boundary Walls (Zero Lot Boundary)**

Refer Plan of Development.

#### **Covenant Bond**

A Covenant Bond has been incorporated into the land sales contract for all properties within Everleigh. The fully refundable Covenant Bond serves to ensure that well designed, quality homes are brought to life to make this an attractive community to be proud of.

#### **Design Committee**

The entity appointed by Mirvac authorised to approve building applications under these Residential Design Standards & Guidelines.

#### Façade

Elevation of a building visible from a Public Area. The primary façade is the elevation facing the primary street.

#### Living Areas

The internal part of your home excluding utility areas such as garage, laundry, bathroom, toilet, hall ways and storage areas.

#### **Local Authority**

Logan City Council or the Department of State Development, Manufacturing, Infrastructure and Planning as applicable.

#### Plan of Development (POD)

The approved Plan of Development — Envelope Plan and Plan of Development — Design Criteria in Annexure A and B.

#### **Primary Street**

The street fronting your lot where the lot has only one street frontage; or for lots with two or more street frontages the street which your home's front door is located.

#### **Private Open Space**

External areas of your lot with an area and dimensions as required by the Plan of Development. Private Open Space areas are not to contain any service items such as bin store, air conditioning condensers or rainwater tanks, etc. It may be roofed or un-roofed.

#### **Public Area**

Any land vested to, or under the control of the Logan City Council. E.g. roads, verges /nature strips, parks, public access ways, etc.

#### **Public Open Space**

Public Area excluding roads and verges/nature strips.

#### **Retaining Wall**

A retaining wall is defined as any retaining structure higher than 200mm.

#### Setback

Refer Plan of Development.

#### Site Coverage

Refer Plan of Development.

#### **Secondary Street**

Applies to lots with more than one street frontage and is the street(s) which is not the primary street.






#### Annexure A

Approved PoD – Envelope Plan

# AREA 1: PLAN OF DEVELOPMENT - ENVELOPE PLANS


**TEVIOT ROAD, GREENBANK** 


**12 OCTOBER 2018** 

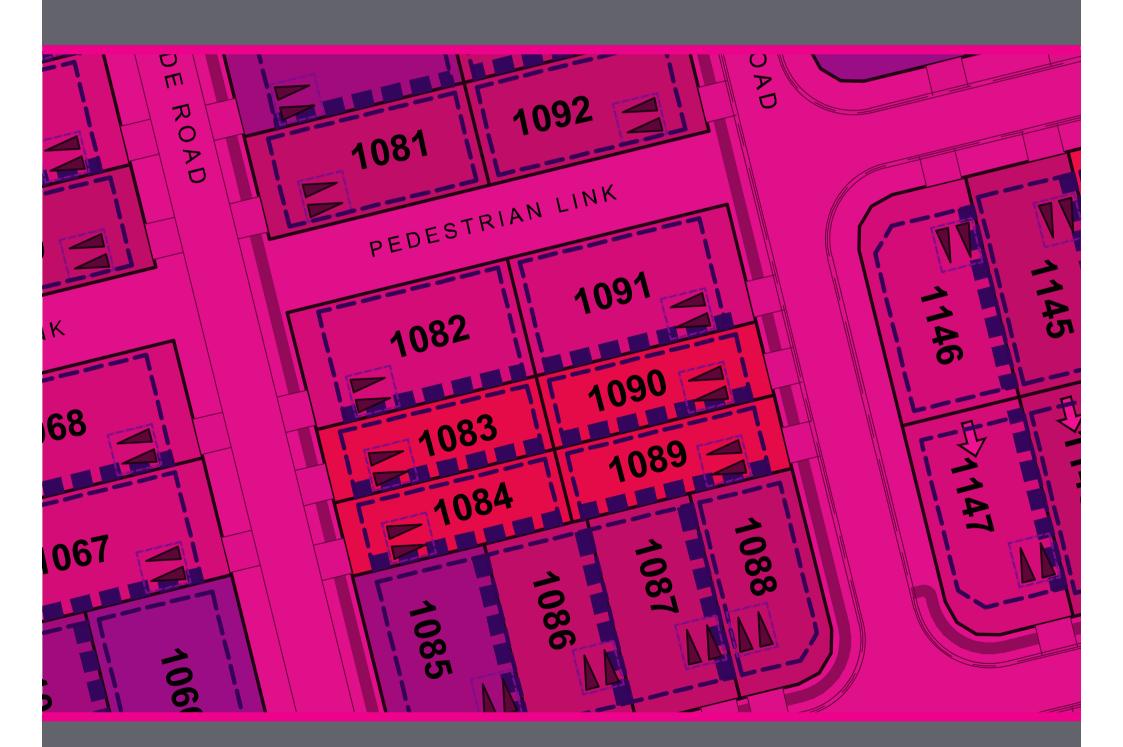







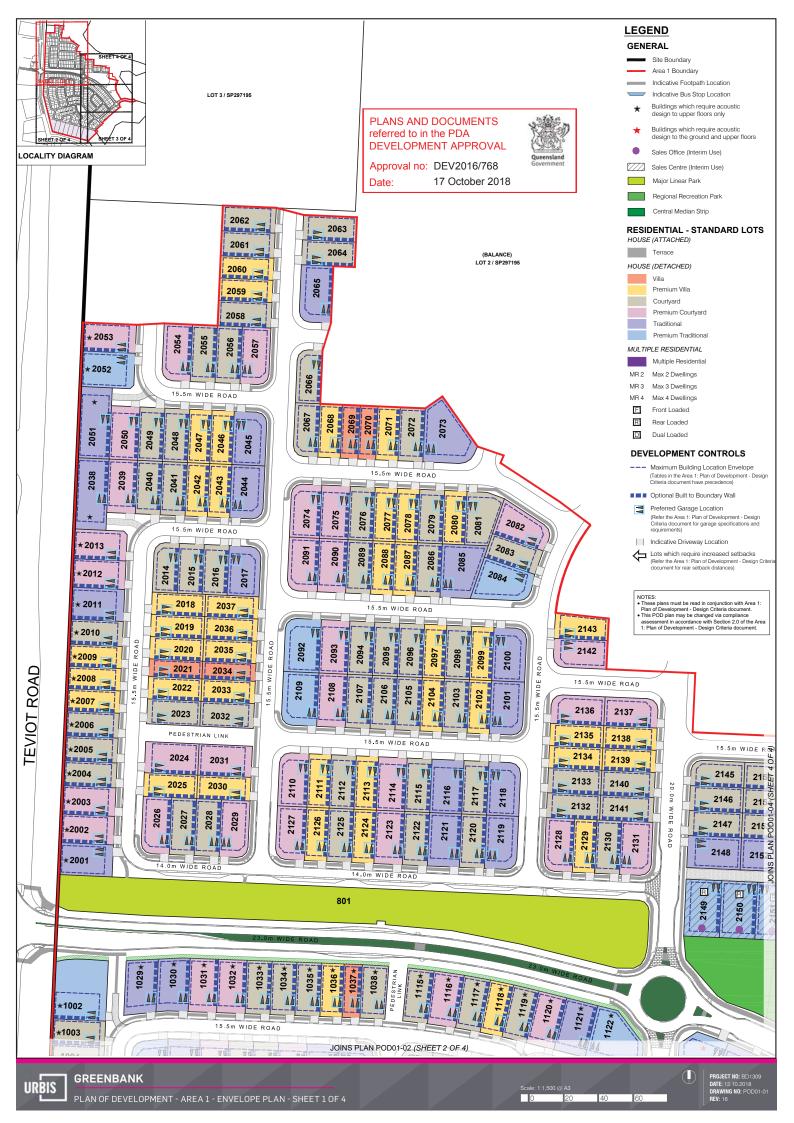

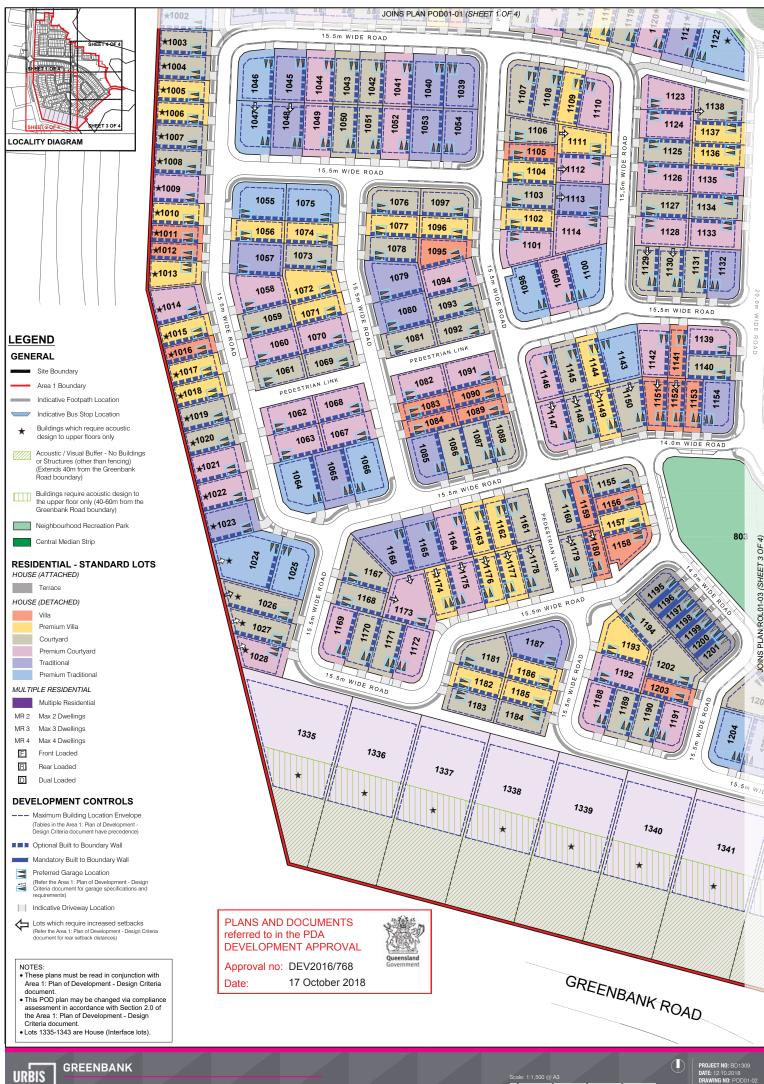

PLAN OF DEVELOPMENT - AREA 1 - ENVELOPE PLAN - SHEET 2 OF 4

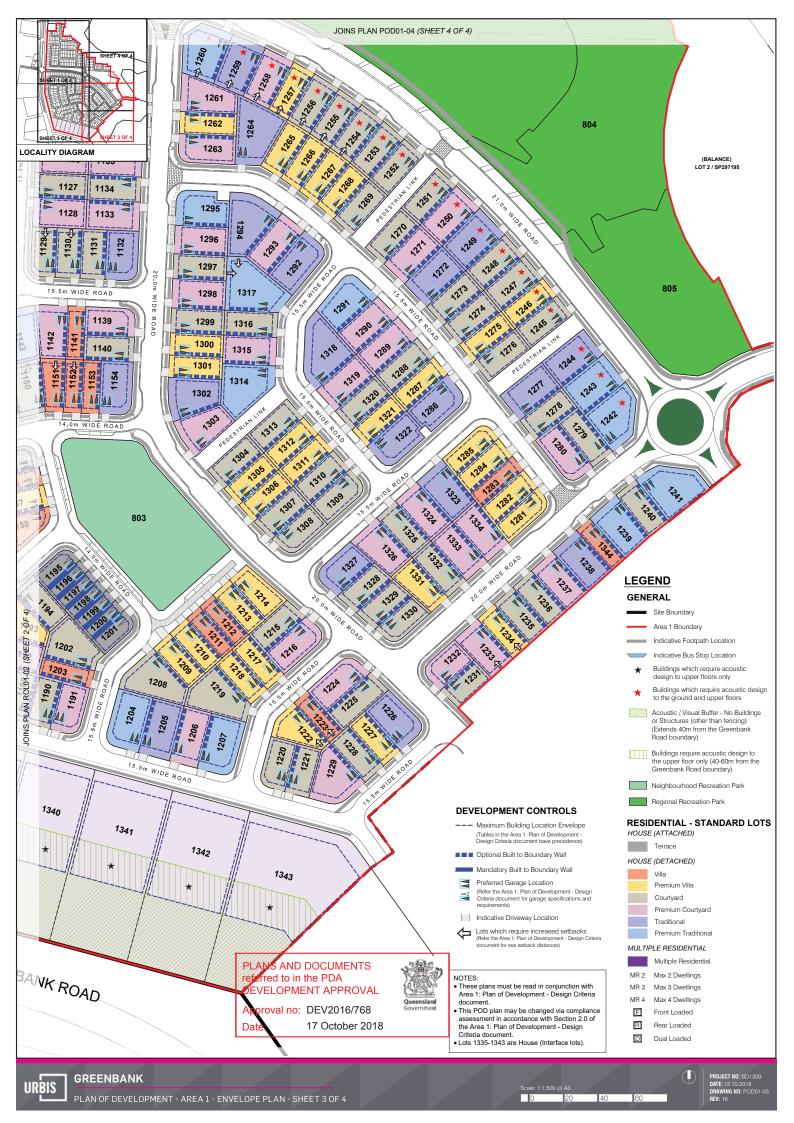

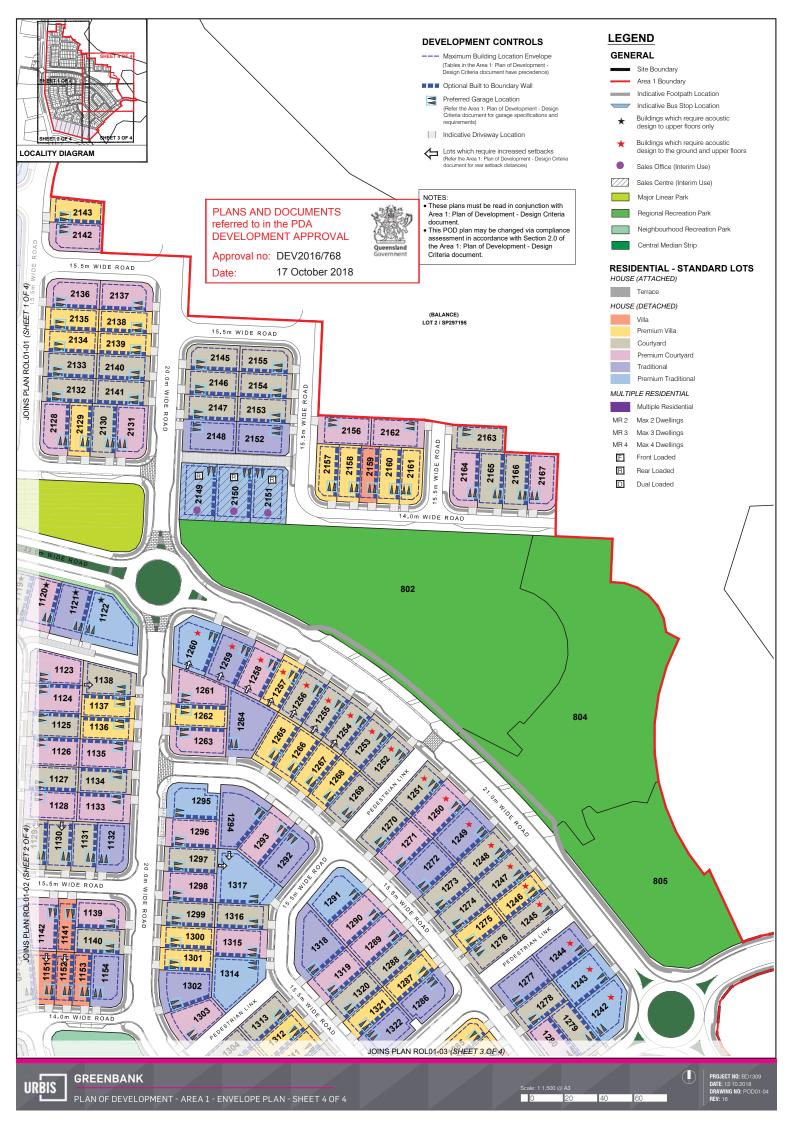

#### **Annexure B**

Approved PoD – Design Criteria

# AREA 1: PLAN OF DEVELOPMENT - DESIGN CRITERIA

PLANS AND DOCUMENTS referred to in the PDA

Approval no: DEV2016/768



TEVIOT ROAD, GREENBANK

12 OCTOBER 2018

		0.0111	1.0m	1.5m
	0.0m	1.0m	1.0m	2.0m
	1.0m	1.0m	1.5m	2.0m
1	1.0m	1.0m	2.0m	2.0r
n	1.0m	2.0m	2.0m	
im	2.0m	2.0m	w <sub>C</sub>	
0m	2.0m	, we we	1 - 1 - 2 - 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3 - 3	
.0m	E E	1 2 5 5 0 m		1,5m
1.5m				-1.0m P
=====		1 L 1.0m		ALL LOT DEPTHS
	1.0m	SEPTIME AND	1.0m   11TV	THE HATE
∠1.0m	EPTHS.	ALL LOT DEPTHS		
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	ALLLOT DEPTHS		- + :ms.+	
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				
		- Lander S. Samer	16.0m	





#### 1.0 APPROVED USES

#### 1.1 USES EXEMPT IN ACCORDANCE WITH THIS PLAN OF DEVELOPMENT

Uses listed in Table 1 and complying with the relevant Design Criteria (Section 3.0 and Section 4.0) in this Plan of Development and Area 1: Plan of Development - Envelope Plans document are approved exempt development.

TABLE 1: LAND USES EXEMPT IN ACCORDANCE WITH THIS PLAN OF DEVELOPMENT

#### LAND USES

- Display Home
  House (detached, attached, or interface lots)
  Park
  Home Based Business
- Multiple Residential (Up to 3 dwelling units where identified on the Area 1: Plan of Development Envelope Plans)
   Advertising Device

#### 1.2 USES SUBJECT TO COMPLIANCE ASSESSMENT

Uses listed in Table 2 and complying with the relevant Design Criteria (Section 3.3, 3.4 and 3.5) in this Plan of Development and Area 1: Plan of Development Envelope Plans document are approved development subject to Compliance Assessment.

TABLE 2: LAND USES USES SUBJECT TO COMPLIANCE ASSESSMENT & DESIGN CRITERIA

- Sales Office (up to 400m² GFA)
   Other Residential (Retirement)
   Multiple Residential (Retirement)
   Multiple Residential (4 or more dwelling units where identified on the Area 1: Plan of Development Envelope Plans)

#### 1.3 DEFINED TERMS

The terms used in this document have a particular meaning as stated in the Greater Flagstone UDA Development Scheme (October 2011) (Development Scheme). The Development Scheme definitions prevail over all other planning instruments to the extent of any inconsistency.

#### 2.0 CRITERIA FOR A CHANGE TO APPROVED LAYOUT FOR GREENBANK AREA 1

#### 2.1 DESIGN STANDARDS FOR A CHANGE TO APPROVED RECONFIGURING A LOT LAYOUT AND PLAN OF DEVELOPMENT ENVELOPE PLANS FOR GREENBANK AREA 1

The following plans and documents can be amended by compliance assessment where generally in accordance with the design standards in Table 3, or as otherwise agreed with the nominated assessing authority.

- 1. Area 1: Plan of Development Envelope Plans (Envelope Plans)
- 2. Area 1: Reconfiguration of a Lot Plans (RoL Plans)

Figure 1 below identifies those fixed elements of the Envelope Plans and RoL Plans that cannot be adversely impacted or changed.

TABLE 3: DESIGN STANDARDS

GENERAL	DESIGN STANDARDS	
Development Yield	The total development yield is to be between 457 and 559 dwellings (being the originally approved 508 dwellings +/- 10%) where not in conflict with the other requirements of Table 3: Design Standards.	
Lot Design	Size & density  no minimum lot size  For Residential - Standard Lots, development achieves a minimum net residential density of 15 dwellings per hectare for Area 1	
	Shape  • Width and depth consistent with typical lot dimensions - refer Section 3.0.	
	Slope   Unless constructed in an integrated or attached development, the finished slope on a lot less than 450m² in area does not exceed:  - 10% side slope - 5% lengthwise slope - 5% lengthwise slope - Less, if both figures approach the maximum together.  - Platform construction required when finished slope on lot is 16% or greater	
Block Size	Length 100-200 metres     Mid-block break providing a pedestrian link when blocks are over 130 metres     Depth 40-80 metres	
Interface Lots	Minimum lot size of 3,000m²	
Lot Layout	No more than eight narrow (less than 10.0 metres) frontage lots in a row. No more than six lots with a width of 7.5 metres to 5.0 metres in a row unless serviced by a rear lane.	
Access	90% of dwellings must be within 400m of a Neighbourhood Recreation Park or other park providing equivalent informal recreation opportunities.     90% of Residential - Standard Lots are within 400 metres of an existing or planned public transport stop.	
Street Network	Grid pattern or modified grid responsive to site characteristics.     Where slope allows, orientation within 15 degrees of north-south or east-west.     To minimise cut & fill, streets follow ridges, guilles, and/or are perpendicular to slope.     Minimise cul-de-sacs where possible. Where proposed, cul-de-sac length is desirably no greater than 10 lots.	
Typical Road Typologies	Roads are designed generally in accordance with the approved Context Plan. Street network includes (where relevant): A trunk connector providing access to neighbourhood connector streets; Neighbourhood connector streets providing direct access to properties and connections to neighbourhood destinations; Neighbourhood access streets provide direct access to properties and neighbourhood lanes; and Neighbourhood access provide direct property access either at the front or rear of lots.	
On-Street Car parking	On-street car parking to be provided at a minimum rate of 0.5 spaces per residential lot.	
Total Park Area Required	Minimum 3.6 ha	


Note: Parks to be provided generally in accordance with the requirements of the Open Space Master Plan Rates of Provision & Accessibility

#### REFERENCE MATERIAL

Guidelines and

Guideline 1 - Residential 30 (May 2015)
Guideline 5 - Neighbourhood Planning and Design (May 2015)
Guideline 6 - Street and Movement Network (April 2012)
Guideline 7 - Low Rise Buildings (May 2015)
Guideline 7 - Low Rise Buildings (May 2015)
Guideline 12 - Park Planning and Design (May 2015)
Guideline 13 - Engineering Standards (May 2015)
Guideline 18 - Development Interfaces (May 2015)

Practice Notes

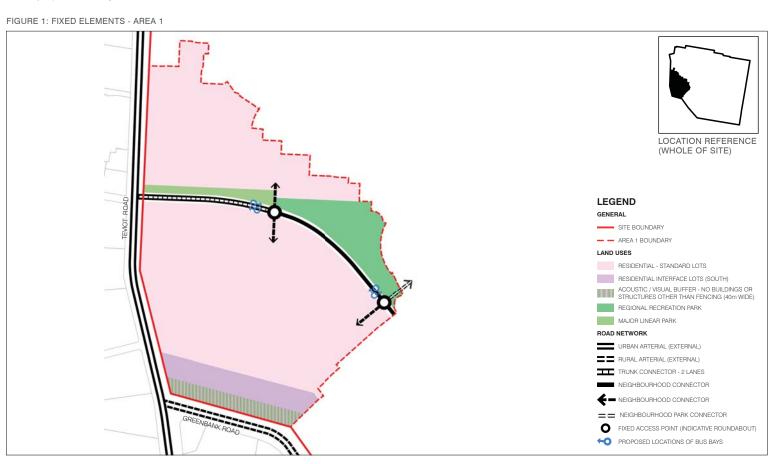

#### 3.0 DESIGN CRITERIA

#### 3.1 HOUSE (DETACHED)

The following criteria apply to a House (Detached) proposals.

#### **Planning Context**

- anning Context
  In accordance with the provisions of the Greater Flagstone Urban Development
  Area Development Scheme (October 2011) (Development Scheme), building
  work and operational work are exempt development where in accordance with, or
  associated with, this Plan of Development (PoD).
- All relevant provisions of this PoD must be satisfied prior to the issuance of a Building Approval.
- The provisions of the Development Scheme will apply where development does not comply with all provisions of the Plan of Development.
- The Development Scheme definitions prevail over all other planning instruments to the extent of any inconsistency.

#### General

- All development is to be undertaken in accordance with the Development Approval.
- Nominated building location envelopes may be constrained by future easements
- Where allotments are so marked on Area 1: Plan of Development Envelope Plans, residential buildings must be designed and constructed to comply with AS3671-1989 Acoustics Road Traffic Noise Intrusion Building, Sting and Construction (floor-plan specific acoustic design) or as per acceptable forms of construction from QDC MP4 Buildings in a Transport Noise Corridor. Refer to the approved Noise Impact Assessment for further information.

#### Setbacks

- Setbacks are as per Table 4: Plan of Development Table House (Detached) (Table 4), unless specified otherwise on this sheet.
- (table 4), unless specimed unleawed of this sheet.

  The permitted location of built to boundary walls are indicated on the Area 1: Plan of Development Envelope Plans.

  Built to boundary walls are not mandatory. Where built to boundary walls are not adopted, side setbacks shall be in accordance with the requirements of the Non-Built to Boundary Setbacks norminated in Table 4.

  All boundary setbacks are measured to the wall of the structure.
- The dwelling and associated projections (gutters etc.) must be located wholly within the subject lot, unless encroachment rights are secured by way of easement (or other suitable mechanism).
- Other than built to boundary walls, the outside face of the fascia, or the roof structure where there is no fascia, or attached sunhoods or the like (not including retractable blinds, fixed screens, rainwater fittings, or ornamental attachments) is permitted to extend 600mm within the prescribed setback, however cannot encroach closer than 450mm from the boundary.
- The length of the built to boundary wall is not to exceed 50% of the lot depth, or 15.0m, whichever is the greatest.
- For corner lots (excluding a corner intersecting with a laneway), no building or structure over 2m high is built within a 6m x 6m truncation at the corner of two road frontages (refer Table 4).
- The primary street frontage elevation is to be articulated to reduce the mass of the building by one or more of the following:

  - Windows recessed into the façade Balconies, porches or verandans Window hoods Shadow lines created on the building through minor changes in the façade (100mm minimum).
- Entrance porticoes may be located closer to the property boundary than stated in Table 4, provided that the portico:
  - Lis located no less than 14 m from the front property boundary, Does not exceed maximum height of 4.5m, Does not exceed a width of 3.0m; and The portico remains open and not enclosed.

#### **Building Height**

- The maximum building height is 9.0m.
- 15. Buildings must have no more than 2 storeys

#### Site Cover

The maximum Area covered by all buildings and structures roofed with impervious

materials, does not exceed the maximum site cover indicated in Table 4, where Area means:

- aa means: for enclosed spaces, the area including the outside wall; and for unenclosed spaces, the area is measured along a line 600mm in from the perimeter of the roof.

#### **Private Open Space and Amenity**

- Each house / dwelling unit has a clearly defined outdoor living space which:

  - Has an area of at least:
     12 sgm with a minimum dimension of 2.4m for a 3 or more bedroom house / dwelling unit;
     9 sgm with a minimum dimension of 2.4m for a 2 bedroom house / dwelling
    - with a minimum dimension of 1.2m for a 1 room or 1 bedroom house 30.

#### **Eaves and Roof Pitch**

- Utility of 5 sqn with a minimum out.
  / dwelling unit.
  Is accessible from a living area; and
  Is accessible from a living area; and
  Is as ground slope of not more than 1 in 10;
  Provides visual privacy from outdoor living spaces on adjacent lots.

   which add visual interest to wall/roof Eaves, or other architectural features which add visual interest to wall/roof junctions (such as parapets), are required to all walls excluding those built to the boundary.
- The maximum roof pitch is 40 degrees.

Parking and Driveways
20. A minimum of two on-site car parking spaces must be provided for each dwelling, one of which must be within a garage.

- one of which must be within a garage.

  Garages

  a. A dwelling on a lot with a primary frontage equal to or greater than 10m and less than 12.5m must athere to the following criteria:

   The front facing building wall, which comprises the garage door, to not exceed an external width of 5.7m

   The garage door:

   Width does not exceed 4.8m; and

  + Bas a minimum 450mm eave above it; and

   Setback a minimum of 240mm behind the pillar of the garage door; and

  + Has a sectional, til to rroller door.

   The front facade of the dwelling is to be forward of the alignment of the garage wall, and include the following:

   A front entrance door with glass inserts and / or windows or with a stdelight where the front door is sold. If the front facade includes a habitable room with window, a sidelight is not required; or expended the control which extends a minimum of 1600mm floward of the entrance door. The verandah, portice or porch is collected over the front entrance, which extends a minimum of 1600mm floward of the entrance door. The verandah, portice or porch is to include front pers with distinct materials

  b. A dwelling on lot with a primary frontage of 12.5m or greater must adhere to the following criteria:

   Must have a garage door not exceeding 40% of the lot frontage

  Double garages are to be setback 1.0m behind the main face of the dwelling at the ground floor.

  For adwelling value and the primary frontage less than 10.0m the garage door width must not exceed 3.0m.

  The maximum width of a driveway at the lot boundary shall be:

- The maximum width of a driveway at the lot boundary shall be
  - 4.8m for a dwelling with a double garage with a lot frontage of 12.5m or
- a. 4. sm for a dwelling with a double garage with a lot frontage of 12.5m or greater;
  b. 3.5m for a dwelling with a double garage with a lot frontage equal to or greater than 10m and less than 12.5m; or
  c. 3.0m for a dwelling with single or tandem garage on any lot frontage.
  Garages are to be located as norminated on the Area 1. Plan of Development-Envelope Plans, or in an alternate location subject to confirmation that there is no conflict with proposed/existing services.
- 25
- A maximum of one driveway per dwelling is permitted unless it is a corner lot where a maximum of two driveways are permitted (1 per frontage).
- The driveway finish must not be plain concrete.
- Driveways are to be:
  - ... this PoU.

    a minimum distance of 6m from an intersection of one street with another 38. There is to be no more than one secondary dwelling on a lot. street; and

- b. designed and constructed in accordance with approval / permit requirements of Logan City Council.
   Carports are only permitted where:
   a. Located behind the façade of the dwelling which faces the primary street frontage; and
   For comer lots, set back a minimum of 3.0m from the secondary street

#### Retaining Walls

- Other than walls erected by the developer, retaining walls:

  a. must be tiered 1m vertical and 1m horizontal where forward of the building line to any street, park or lane and visible from the public realm; and b. cannot exceed 1.5m in height without stepping elements incorporated.
- b. cannot exceed 1.5m in height without stepping elements incorporated.
   For sloping lots:
   a. Where a built to boundary wall is permitted, this wall must be projected to at least 150mm below the likely pad level of the adjacent block. The pad level can be assumed to be the average of the four corners of the adjacent block using the As Built levels. The build down of the build to boundary wall must be in a material consistent with the visible section of the wall immediately above it.

#### Fencing

- arv frontage requirements:
- The maximum fence height is 1.8m; Fences are not permitted along road frontages forward of the building;
- and Side boundary fences are to be recessed at least Im behind the wall addressing the primary road frontage (as seen on the right).
- Im behind the wall addressing the primary road frontage (as seen on the right).

  32 Secondary frontage requirements:

  a. Fences to Secondary Frontages (Side) of Corner Lots may extend beyond the face of the secondary facade only on the basis the fencing visible from the public area is:

   A maximum fence leight of 1.8m;

   Solid up to a height of 1.2m with any fencing above 1.2m in height being at least 50% transparent or the fence can be at least 25% transparent or the terrasparency is consistent across the full area of the fence (i.e. transparent sections cannot be located solely at ground level); and

   Does not extend for lengths greater than 10m without a landscaped recess 3m in length and 1m deep (as seen on the right).

  33. Pedestrian link requirements:

   Fances to pedestrian links:

   A maximum fence height of 1.8m; and

   Solid up to a height of 1.2m with any fencing above 1.2m in height being at least 50% transparent or the fence can be at least 25% transparent overall where the transparency is consistent across the full area of the fence (i.e. transparent sections cannot be located solely at ground level).

  Structures and Services

- Nationary and Services
  All ancillary structures (e.g. garden sheds, gazebos, pools) and services are to be suitably located or screened to minimise detrimental visual impact from public spaces or neighbouring residential allotments, with the exception of solar panels and solar hot water systems which may be located where most efficient.
- Screened drying areas are to be located behind the main face of the dwellings
- Rubbish bin areas are to be located behind the main face of the dwellings or stored so as to not be visible from the public realm.


#### Secondary Dwelling

- A secondary dwelling is only permitted where:

  a. The lot is 400m² or more;
  b. The lot frontage is 12.5m or more; and
  c. It complies with the applicable self assessable provisions in Schedule 3 of the Development Scheme where not inconsistent with the provisions of this PoD.

#### TABLE 4: PLAN OF DEVELOPMENT TABLE - HOUSE (DETACHED)

INDICATIVE ALLOTMENT TYPE (PRIMARY REFERENCE FOR ALLOTMENT TYPE IS THE AREA 1: PLAN OF DEVELOPMENT - ENVELOPE PLANS)  INDICATIVE ALLOTMENT WIDTH (FRONTAGE)		VILLA	PREMIUM VILLA	COURTYARD	PREMIUM COURTYARD	TRADITIONAL	PREMIUM TRADITIONAL
		10m	12.5m	14m	16m	18m	20m
FRONT SETBACKS					<b>'</b>	-	'
PRIMARY FRONTAGE	To Wall (Ground Floor)	3.0m	3.0m	3.0m	4.0m	4.5m	4.5m
For lots with multiple street frontages: a. A lot only has one primary frontage. b. The primary frontage for a corner lot is	To Wall (First Floor)	3.0m	3.0m	3.0m	4.0m	4.5m	4.5m
as per the Area 1: Plan of Development – Building Envelope Plan (if nominated)	To Garage Door	5.0m	5.0m	5.0m	5.0m	5.5m	5.5m
OF COMPARY FROM TAGE	To Wall (Ground Floor)	1.5m	2.0m	2.0m	2.0m	3.0m	3.0m
SECONDARY FRONTAGE  Note: A Pedestrian Link is not a secondary frontage	To Wall (First Floor)	2.0m	2.0m	2.0m	2.0m	3.0m	3.0m
	To Garage Door	5.0m	5.0m	5.0m	5.0m	5.0m	5.0m
REAR SETBACK							
Where allotments are so marked	Ground Floor	2.5m	2.5m	2.5m	2.5m	2.5m	2.5m
(➡) on Area 1: Plan of Development - Envelope Plan.	First Floor	2.5m	2.5m	2.5m	2.5m	2.5m	2.5m
For lots located on the low side of a tiered/stepped retaining wall greater than 2.0m total height	Ground Floor	2.5m	2.5m	2.5m	2.5m	2.5m	2.5m
	First Floor	2.5m	2.5m	2.5m	2.5m	2.5m	2.5m
	Ground Floor	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m
For all other lots	First Floor	2.0m	2.0m	2.0m	2.0m	2.0m	2.0m
SIDE SETBACK							
SIDE SETBACK Built to Boundary	Ground Floor	0-0.3m	0-0.3m	0-0.3m	0-0.3m	0-0.3m	0-0.3m
	First Floor	0.9m	1.0m	1.0m	1.0m	1.5m	1.5m
SIDE SETBACK	Ground Floor	0.9m	1.0m	1.0m	1.0m	1.5m	1.5m
Non-Built to Boundary	First Floor	0.9m	1.0m	1.0m	1.5m	2.0m	2.0m
CITE COVED		700/	700/	C00/	600/	600/	609/

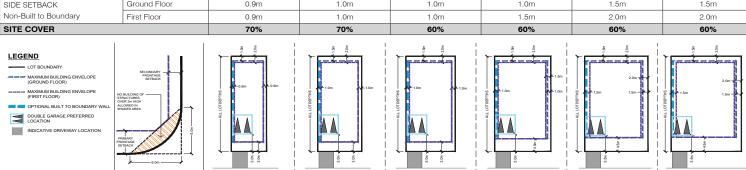

-14.0m

16.0m

-12.5m

- 20.0m

18.0m

ل—10.0m →

CORNER LOTS

#### 3.2 HOUSE (ATTACHED)

The following criteria apply to House (attached) proposals

- Planning Context
   In accordance with the provisions of the Greater Flagstone Urban Development Area Development Scheme (October 2011) (Development Scheme), building work and operational work are exempt development where in accordance with, or associated with, this Plan of Development (PoD).
- All relevant provisions of this PoD must be satisfied prior to the issuance of a Building Approval.
- The provisions of the Development Scheme will apply where development does not comply with all provisions of the Plan of Development.
- The Development Scheme definitions prevail over all other planning instruments to the extent of any inconsistency.

- All development is to be undertaken in accordance with the Development Approval.
- Nominated building location envelopes may be constrained by future easements and/or services
- and/or services.

  Where allotments are so marked on Area 1: Plan of Development Envelope Plans, residential buildings must be designed and constructed to comply with ASa671-1989 Acoustics Road Traffic Notice Intrusion Building, Siting and Construction (floor-plan specific acoustic design) or as per acceptable forms of construction from ODC MP44 Buildings in a Transport Noise Corridor. Refer to the approved Noise Impact Assessment for further information.

- Setbacks are as per Table 5: Plan of Development Table House (Attached) (Table 5), unless specified otherwise on this sheet.
- The permitted location of built to boundary walls are indicated on the Area 1: Plan of Development Envelope Plans.
- Where built to boundary walls are not adopted, side setbacks shall be in accordance with the Non-Built to Boundary Wall setbacks nominated in Table 5.
- Length of Built to Boundary walls shall be no more than:

- Length of Built to Boundary walls shall be no more than:
  a. 80% for a house on a lot width of 7.5 m or less
  b. 75% for a house on a lot width of 7.5 m 9.9 m
  c. 70% for a house on a lot width of 10 m 12.4 9m
  d. 65% for a house on a lot width of 10 m 12.4 9m
  e. 60% for a house on a lot width of 115 m 19.9 m
  f. 55% for a house on a lot width of 20 m or greater
  All boundary setbacks are measured to the wall of the structure.
- The dwelling and associated projections (gutters etc.) must be located wholly within the subject lot, unless encroachment rights are secured by way of easement (or other suitable mechanism).
- Other than built to boundary walls, the outside face of the fascia, or the roof structure where there is no fascia, or attached sunhoods or the like (not including retractable blinds, fixed screens, rainwater fittings, or ornamental attachments) of a building is permitted to extend 600mm within the prescribed setback, however cannot encroach closer than 450mm from the boundary.
- For corner lots (excluding a corner intersecting with a laneway), no building or structure over 2m high is built within a 6m x 6m truncation at the corner of two road frontages (refer Table 5).
- road frontages (feter lable 5).
  The primary street frontage elevation is to be articulated to reduce the mass of the building by one or more of the following:

  a. Windows recessed into the façade
  b. Balconies, porches or verandahs
  c. Window hoods
  d. Shadow lines created on the building through minor changes in the façade (100mm minimum).
- Entrance porticoes may be located closer to the property boundary than stated in Table 5 provided that the portico:
  - Is located no less than 1.4m from the front property boundary;

    Does not exceed a maximum height of 4.5m;

    Does not exceed a width of 3.0m; and

    The portico remains open and not enclosed.

#### **Building Height**

- The maximum building height is 9.0m.
- 15. Buildings must have no more than 2 storeys

#### Site Cover

- 9 Cover
  The maximum Area covered by all buildings and structures roofed with impervious materials, does not exceed the maximum site cover indicated in Table 5, where Area means:

  a. for enclosed spaces, the area including the outside wall; and
  b. for unenclosed spaces, the area is measured along a line 600mm in from the perimeter of the root.

#### Private Open Space and Amenity

- Buildings must ensure the provision of natural light and ventilation to core living
- areas.

  18. Each house / dwelling unit has a clearly defined outdoor living space which:

  a. Has an area of at least:

   12 sgm with a minimum dimension of 2.4m for a 3 or more bedroom house / dwelling unit;

   9 sgm with a minimum dimension of 2.4m for a 2 bedroom house / dwelling unit;

   5 sgm with a minimum dimension of 1.2m for a 1 room or 1 bedroom house / dwelling unit; and

  b. Is accessible from a living area; and

  c. Has a ground slope of not more than 1 in 10; and

  d. Provides visual privacy from outdoor living spaces on adjacent lots.

  Eaves and Roof Pitch.

#### **Eaves and Roof Pitch**

- Eaves, or other architectural features which add visual interest to wall/roof junctions (such as parapets), are required to all walls excluding those built to the boundary.
- 20. The maximum roof pitch is 40 degrees.

#### Parking and Driveways

- 21. A minimum of two on-site car parking spaces must be provided for each dwelling, one of which must be within a garage.

- dwelling, one of which must be within a good.

  Garages:

  a. Front loaded attached allotments must adhere to the following criteria:

   For lot frontages less than 10m, single or tandem garages must be used;
   For lot frontages equal to or greater than 10m and less than 125m, double garages can be used where the garage door width does not exceed 4.8m;
   For lot frontages greater than 125 ms, single, tandem or double garages may be used where the garage door width does not exceed 4.0% of the lot frontage; and
   Double garages are to be setback 1.0m behind the main face of the dwelling, excluding balconies.

  The maximum width of a driveway at the lot boundary shall be:

  a. 4.8m for a dwelling with a double garage on a lot with a width of 12.5m or greater.

- a. 4. On the a dwelling on a lot with a width between 10m to 12.49m.
  b. 3.5m for a dwelling on a lot with a width between 10m to 12.49m.
  c. 3.0m for a dwelling with a single or tandem garage on any lot.
  A maximum of one driveway per dwelling is permitted unless it is a corner lot where a maximum of two driveways are permitted (1 per frontage).
- 25. Where accessed from a laneway, garages are to be paired (built to a common boundary where possible).
- The driveway finish must not be plain concrete.
- Driveways are to be:
- a. a minimum distance of 6m from an intersection of one street with another street; and b. designed and constructed in accordance with approval / permit requirements of Logan City Council.

#### Retaining Walls

- Other than walls erected by the developer, retaining walls:
   a. must be tiered 1m vertical and 1m horizontal where forward of the building line to any street, park or lane and visible from the public realm; and b. cannot exceed 1.5m in height without stepping elements incorporated.

- - In styping ruls:
    a. Where a built to boundary wall is permitted, this wall must be projected to at least 150mm below the likely pad level of the adjacent block. The pad level can be assumed to be the average of the four corners of the adjacent block using the As Built levels. The build down of the build to boundary wall must be in a material consistent with the visible section of the wall immediately above it.

#### Fencing

- For front loaded lots the Primary Frontage requirements are as follows:
- a. b.
- I front loaded iots the Pithlary Frontage requirements a The maximum fence height is 1.8m; Fences are not permitted along road frontages forward of the building; and Side boundary fences are to be recessed at least m behind the wall addressing the primary road frontage (as seen on the right).
- For rear loaded lots the Primary Frontage requirements are as follows:
- rans includes.

  The maximum fence height is 1.2m;

  Fences are permitted along the Primary Frontage

  and the side boundaries forward of the façade facing the Primary Front-
- age; and Fences must be at least 50% transparent For all lots the Secondary Frontage requirements are as follows
- r all lots the Secondary Frontage requirements are as follo-Fences may extend beyond the face of the second-ary façade only on the basis the fencing visible from the public area is:

   A maximum fence height of 1.8m;

   Solid up to a height of 1.2m with any fencing above 1.2m in height being at least 50% transparent or the fence can be at least 25% transparent overall where the transparency is consistent across the full area of the fence (i.e. transparent sections cannot be located solely at ground level); and
   Does not extend for lengths greater than 10m without a landscaped recess 3m in length and 1m deep (as se on the right).

- a landscaped recess 3m in length and 1m deep (as seen on the right).

  33. Pedestrian link:

  a. Fences to pedestrian links:

   A maximum fence height of 1.8m; and

   Solid up to a height of 1.2m with any fencing above 1.2m in height being at least 50% transparent or the fence can be at least 25% transparent overall where the transparency is consistent across the full area of the fence (i.e. transparent sections cannot be located solely at ground level).

  34. Within laneways 1.8m bint fences are premitted to screen private onen space.

**∏**Min 3rr

FRONTAGE

Within laneways, 1.8m high fences are permitted to screen private open space, car parking and servicing areas.

#### Letterboxes

Letter107XES
35. For rear loaded lots, letterboxes for the dwelling shall be located on the primary street or park frontage and not in the laneway.

#### Structures and Services

- Structures and Services

  6. All ancillary structures (e.g. garden sheds, gazebos, pools) and services are to be suitably located or screened to minimise detrimental visual impact from public spaces or neighbouring residential allotments, with the exception of solar panels and solar hot water systems which may be located where most efficient.

  37. Screened drying areas are to be located behind the main face of the dwellings.
- Rubbish bin areas are to be located behind the main face of the dwellings or stored so as to not be visible from the public realm.

#### Secondary Dwelling

- A secondary dwelling
  A secondary dwelling is only permitted where:
  a. The lot is 400m° or more;
  b. The lot frontage is 12.5m or more; and
  c. It complies with the applicable self assessable provisions in Schedule 3 of the Development Scheme where not inconsistent with the provisions of this PoD.
- 40. There is to be no more than one secondary dwelling on a lot.


#### TABLE 5: PLAN OF DEVELOPMENT TABLE - HOUSE (ATTACHED)


INDICATIVE ALLOTMENT TYPE (PRIMARY REFERENCE FOR ALLOTMENT TYPE IS THE AREA 1: PLAN OF DEVELOPMENT - ENVELOPE PLANS)		FRONT LOADED	REAR LOADED	DUAL LOADED				
FRONT SETBACKS	-RONT SETBACKS							
PRIMARY FRONTAGE	To Wall (Ground Floor)	3.0m	3.0m	3.0m				
For lots with multiple street frontages: a. A lot only has one primary frontage.	To Wall (First Floor)	3.0m	3.0m	3.0m				
b. The primary frontage for a corner lot is as per the Area 1: Plan of Development – Building Envelope Plan (if nominated)	To Garage Door	5.0m	N/A	5.0m				
SECONDARY FRONTAGE	To Wall (Ground Floor)	1.5m	1.5m	2.0m				
Note: A Pedestrian Link is not a secondary frontage	To Wall (First Floor)	2.0m	2.0m	2.0m				
	To Garage Door	N/A	N/A	5.0m				
REAR SETBACK								
Where allotments are so marked (⇔) on Area 1: Plan of Development - Envelope Plan.	Ground Floor	2.5m	2.5m	2.5m				
	First Floor	2.5m	2.5m	2.5m				
For lots located on the low side of a tiered/stepped retaining wall greater than 2.0m total height	Ground Floor	2.5m	2.5m	2.5m				
	First Floor	2.5m	2.5m	2.5m				
For all other lots	Ground Floor	1.5m	1.5m	1.5m				
	First Floor	1.5m	1.5m	1.5m				
	To Garage Door	N/A	1.5m	N/A				
SIDE SETBACK								
SIDE SETBACK	Ground Floor	0-0.3m	0-0.3m	0-0.3m				
Built to Boundary	First Floor	0-0.3m	0-0.3m	0-0.3m				
SIDE SETBACK	Ground Floor	0.9m	1.0m	1.0m				
Non-Built to Boundary	First Floor	0.9m	1.0m	1.0m				
SITE COVER		75%	75%	70%				


#### LEGEND - LOT BOUNDARY
















**GREENBANK** 

The following criteria apply to Multiple Residential Proposals.

#### **Planning Context**

- anning Context in accordance with the provisions of the Greater Flagstone Urban Development Area Development Scheme (October 2011) (Development Scheme), building work and operational work are exempt development where in accordance with, or associated with, this Plan of Development (PoD)
- All relevant provisions of this PoD must be satisfied prior to the issuance of a Building Approval.
- The provisions of the Development Scheme will apply where development does not comply with all provisions of the Plan of Development.
- The Development Scheme definitions prevail over all other planning struments to the extent of any inconsistency

#### General

- All development is to be undertaken in accordance with the Development Approval
- Nominated building location envelopes may be constrained by future easements and/or services.
- Where allotments are so marked on Area 1: Plan of Development Where allotments are so marked on Area 1: Plan of Development -Envelope Plans, residential buildings must be designed and constructed to comply with AS3671-1989 Acoustics - Road Traffic Noise Intrusion -Building, Siting and Construction (floor-plan specific acoustic design) or as per acceptable forms of construction from QDC MP4.4 - Buildings in a Transport Noise Corridor. Refer to the approved Noise Impact Assessmer for butthey integration. for further information.

#### Setbacks

- Setbacks are as per Table 6: Plan of Development Table Multiple Residential (Table 6), unless specified otherwise on this sheet.
- All boundary setbacks are measured to the wall of the structure
- 6 The dwelling and associated projections (gutters etc.) must be located wholly within the subject lot, unless encroachment rights are secured by way of easement (or other suitable mechanism)
- Other than built to boundary walls, the outside face of the fascia, or the roof Structure where there is no fascia, or attached sunhoods or the like (not including retractable blinds, fixed screens, rainwater fittings, or ornamental attachments) of a building is permitted to extend 600mm within the prescribed setback, however cannot encroach closer than 450mm from the boundary.
- For corner lots (excluding a corner intersecting with a laneway), no building or structure over 2m high is built within a 6m x 6m truncation at the corner of two road frontages (refer Table 6).
- The primary street frontage elevation is to be articulated to reduce the mass of the building by one or more of the following:

  a. Windows recessed into the façade
  b. Balconies, porches or verandahs
  c. Window hoods
  d. Shadow lines created on the building through minor changes in the façade (100mm minimum).
- Entrance porticoes may be located closer to the property boundary than stated in the Table 6 provided that the portico:
  - les in the ladied provided that the political.

    Is located no less than 1.4m from the front property boundary;
    Does not exceed a maximum height of 4.5m;
    Does not exceed a width of 3.0m; and
    The portico remains open and not enclosed.

#### **Building Height**

- The maximum building height is 9.0m.
- 12. Buildings must have no more than 2 storeys

#### Site Cover

- The maximum Area covered by all buildings and structures roofed with mpervious materials, does not exceed the maximum site cover indicated in Table 6 where Area means

  - ne o, where Area means, for enclosed spaces, the area including the outside wall; and for unenclosed spaces, the area is measured along a line 600mm in from the perimeter of the roof.

#### **Private Open Space and Amenity**

- Each house / dwelling unit has a clearly defined outdoor living space which:

  - 12sqm with a minimum dimension of 2.4m for a 3 or more bedroom house / dwelling unit;
    - 9sqm with a minimum dimension of 2.4m for a 2 bedroom house / dwelling unit; or
  - 5sqm with a minimum dimension of 1.2m for a 1 room or 1 bedroom
- house / dwelling unit.
  b. Is accessible from a living area;
  c. Has a ground slope of not more than 1 in 10; and
  d. Provides visual privacy from outdoor living spaces on adjacent lots. Or communal open space is provided which:

  - a. has an area of at least 25% of the area of the lot; and
     b. is of a shape which can include a circle with a 4.0m diameter
- 15. Buildings must ensure the provision of natural light and ventilation to core living areas.

#### **Eaves and Roof Pitch**

- Eaves, or other architectural features which add visual interest to wall/roof junctions (such as parapets), are required to all walls.
- 17. The maximum roof pitch is 40 degrees.

#### **Parking and Driveways**

- A minimum of two on-site car parking spaces must be provided for each dwelling, one of which must be within a garage.
- 19. For all front-loaded attached allotments, garages are not to dominate the streetscape.
- 20. A maximum of one driveway per dwelling permitted.
- 21. Where accessed from a laneway, garages are to be paired where possible.
- 22. The driveway finish must not be plain concrete.
- 23. Driveways are to be:
  - a. a minimum distance of 6m from an intersection of one street with another street; and
  - designed and constructed in accordance with approval / permit requirements of Logan City Council. b.

#### **Retaining Walls**

- 24. Other than walls erected by the developer, retaining walls
  - must be tiered 1m vertical and 1m horizontal where forward of the building line to any street, park or lane and visible from the public realm;
  - cannot exceed 1.5m in height without stepping elements incorporated

#### Fencing

- 25. For front loaded dwellings the Primary Frontage requirements are as follows:

  - ows.
    The maximum fence height is 1.8m;
    Fences are not permitted along road frontages forward of the building; and
    Side boundary fences are to be setback at least 1m behind the face
  - C. of the wall addressing the primary road frontage (as seen on the right).
- For rear loaded dwellings the Primary Frontage requirements are as follows:
- lows:
  The maximum fence height is 1.2m;
  Fences are permitted along the Primary Frontage and the side boundaries forward of the façade facing the Primary Frontage; and Fences must be at least 50% transparent.
- c. Fences must be at least 50% transparent.
  For all dwellings the Secondary Frontage requirements are as follows:

  a. Fences may extend beyond the face of the secondary façade only on the basis the fencing visible from the public area is:

   A maximum fence height of 1.8m;
   Solid up to a height of 1.2m with any fencing above 1.2m in height being at least 50% transparent or the fence can be at least 25% transparent or werall where the transparency is consistent across the full area of the fence (ie. transparent sections cannot be located solely at ground level); and
   Does not extend for lengths greater than 10m without a landscaped recess 3m in length and 1m deep (as seen on the right).

  Pedestrian link requirements:
- 28. Pedestrian link requirements

  - Pedesirian link requirements:

    A Fences to pedestrian links:

    A maximum fence height of 1.8m; and

    Solid up to a height of 1.2m with any fencing above 1.2m in height being at least 50% transparent or the fence can be at least 25% transparent or verall where the transparency is consistent across the full area of the fence (i.e. transparent sections cannot be located solely at ground level).

PRIMARY

Within laneways, 1.8m high fences are permitted to screen private open space, car parking and servicing areas.

#### Letterboxes

For rear loaded dwellings, letterboxes shall be located on the primary street or park frontage and not in the laneway.


#### Structures and Services


- Structures and services 31. All ancillary structures (e.g. garden sheds, gazebos, pools) and services are to be suitably located or screened to minimise detrimental visual impact from public spaces or neighbouring residential allotments, with the exception of solar panels and solar hot water systems which may be located where most efficient.
- 32. Screened drying areas are to be located behind the main face of the dwellings
- 33. Rubbish bin areas are to be located behind the main face of the dwellings or stored so as to not be visible from the public realm.


#### TABLE 6: PLAN OF DEVELOPMENT TABLE - MULTIPLE RESIDENTIAL


INDICATIVE ALLOTMENT TYP	_			
(PRIMARY REFERENCE FOR ALLOTMENT TYPE IS THE AREA 1: PLAN OF DEVELOPMENT - ENVELOPE PLANS)		FRONT LOADED	REAR LOADED	DUAL LOADED
FRONT SETBACKS				
PRIMARY FRONTAGE For lots with multiple street frontages:	To Wall (Ground Floor)	3.0m	3.0m	3.0m
A lot only has one primary frontage.     The primary frontage for a corner lot is     as per the Area 1: Plan of Development –	To Wall (First Floor)	3.0m	3.0m	3.0m
Building Envelope Plan (if nominated)	To Garage Door	5.0m	N/A	5.0m
SECONDARY FRONTAGE	To Wall (Ground Floor)	1.5m	1.5m	2.0m
Note: A Pedestrian Link is not a secondary frontage	To Wall (First Floor)	2.0m	2.0m	2.0m
	To Garage Door	N/A	N/A	5.0m
REAR SETBACK				
For lots located on the low side of a tiered/stepped retaining wall greater than 2.0m total height	Ground Floor	2.5m	2.5m	2.5m
	First Floor	2.5m	2.5m	2.5m
For all other lots	Ground Floor	1.5m	1.5m	1.5m
	First Floor	1.5m	1.5m	1.5m
	To Garage Door	N/A	1.5m	N/A
SIDE SETBACK				
SIDE SETBACK	Ground Floor	1.0m	1.0m	1.5m
Non-Built to Boundary	First Floor	1.0m	1.0m	1.5m
SITE COVER		75%	75%	70%











#### 3.4 SALES OFFICE

The following criteria apply to a Sales Office:

- The hours of operation of the sales office do not commence before 7am or extend later than 6pm.
- A minimum of 2 on-site car parking spaces are provided
- Private open space and public frontage are turfed and landscaped.

#### 3.5 OTHER RESIDENTIAL

The following criteria apply to Other Residential:

- Development has minimum boundary clearances that comply with Table 7.
- Each dwelling has private open space with direct access from the principal living areas of each dwelling of a shape which can include a circle with 2.4m diameter.
- An outdoor communal open space area being a minimum 10% of the site area is provided.
- 90% of development is located within 400m of a bus service.

#### TABLE 7: PLAN OF DEVELOPMENT TABLE - OTHER RESIDENTIAL

Setbacks		
Front Setback		4.0m
	where the height of that part is 4.5m or less	1.5m
Side Boundary	where the height of that part is greater than 4.5m but not more than 7.5m	2.0m
	where the height is greater than 7.5m	2.0m
Rear Boundary		6.0m
Maximum Building Height		

#### 3.6 HOUSE (INTERFACE LOTS)

- Planning Context
  In accordance with the provisions of the Greater Flagstone Urban Development Area Development Scheme (October 2011) (Development Scheme), building work and operational work are exempt development where in accordance with, or associated with, this Plan of Development (PoD).
- All relevant provisions of this PoD must be satisfied prior to the issuance of a Building Approval.
- The provisions of the Development Scheme will apply where development does not comply with all provisions of the Plan of Development.
  The Development Scheme definitions prevail over all other planning instruments to the extent of any inconsistency.

#### General

- All development is to be undertaken in accordance with the Development Approval.
- Nominated building location envelopes may be constrained by future easements and/or services.
- Where allotments are so marked on Area 1: Plan of Development Envelope where additional said so makes to make 1, relation to Development - Envelope Plans, respirational said so makes to designed and constructed to comply with AS3671-1699 (douchas specific acution to design) or as per acceptable forms of construction of the plant specific acution design) or as per acceptable forms of construction from the plant of the plant specific acution of the property of the property of the approved from the plant of the

#### Setbacks

- Setbacks are as per Table 8: Plan of Development Table House (Interface Lots) (Table 8), unless specified otherwise on this sheet.
- All boundary setbacks are measured to the wall of the structure.
- The dwelling and associated projections (gutters etc.) must be located wholly within the subject lot, unless encroachment rights are secured by way of easement (or other suitable mechanism).

#### **Building Height**

- aximum building height is 9.0m.
- 8. Buildings must have no more than 2 storeys.

- The maximum Area covered by all buildings and structures roofed with impervious materials, does not exceed site cover of 25% where Area means:
- a. for enclosed spaces, the area including the outside wall; and
   b. for unenclosed spaces, the area is measured along a line 600mm in
   from the perimeter of the roof.

#### **Eaves and Roof Pitch**

- Eaves, or other architectural features which add visual interest to wall/roof junctions (such as parapets), are required to all walls.
   The maximum roof pitch is 40 degrees.

#### Parking and Driveways

- 12. A minimum of two on-site car parking spaces must be provided for each dwelling.
- A double garage must be used.
- 14. The maximum width of a driveway at the lot boundary shall be 4.8m.
- A maximum of one driveway per dwelling is permitted.
- The driveway finish must not be plain concrete
- Driveways are to be designed and constructed in accordance with approval / permit requirements of Logan City Council.

#### **Retaining Walls**

- 18. Other than walls erected by the developer, retaining walls:

   must be tiered 1m vertical and 1m horizontal where forward of the building line to any street, park or lane and visible from the public realm; and cannot exceed 1.5m in height without stepping elements incorporated.

#### Fencing

- The maximum fence height is 1.2m.
- 20. Fences are permitted to all frontages
- 21. Fences must be at least 50% transparent.

#### Structures and Services


- All ancillary structures (e.g. garden sheds, gazebos, pools) and services are to be suitably located or screened to minimise detrimental visual impact from public spaces or neighbouring residential allotments, with the exception of solar panels and solar hot water systems which may be located where most efficient.
- Screened drying areas are to be located behind the main face of the dwellings.
- 24. Rubbish bin areas are to be located behind the main face of the dwellings or stored so as to not be visible from the public realm.

#### Secondary Dwelling

- secondary dwelling is only permitted where:
  The lot is 400m² or more;
  The lot frontage is 12.5m or more; and
  It complies with the applicable self assessable provisions in Schedule 3 of the
  Development Scheme where not inconsistent with the provisions of this PoD.
- 26. There is to be no more than one secondary dwelling on a lot.

#### TABLE 8: PLAN OF DEVELOPMENT TABLE - HOUSE (INTERFACE LOTS)

		,		
Setbacks				
Front Setback		6.0m		
Side Boundary	Ground Floor	1.5m		
Side Boundary	First Floor	2.0m		
Rear Boundary		40m (Note that acoustic attenuation may be required where structures are built within 40-60m of the rear boundary)		



#### **LEGEND**

Site Boundary

Buildings which require acoustic design to upper floors only.

Acoustic Buffer / Visual Buffer - No Buildings or Structures (other than fencing) (extends 40m from the Greenbank Road Boundary)

Buildings require Acoustic Design to the upper floor only (40-60m from the Greenbank Road Boundary)


Maximum Building Location Envelope (Ground Floor)

Maximum Building Location Envelope (First Floor)

#### 4.0 ADVERTISING DEVICES

**URBIS** 

Advertising Devices in accordance with the controls on this sheet are exempt in accordance with this Plan of Development.

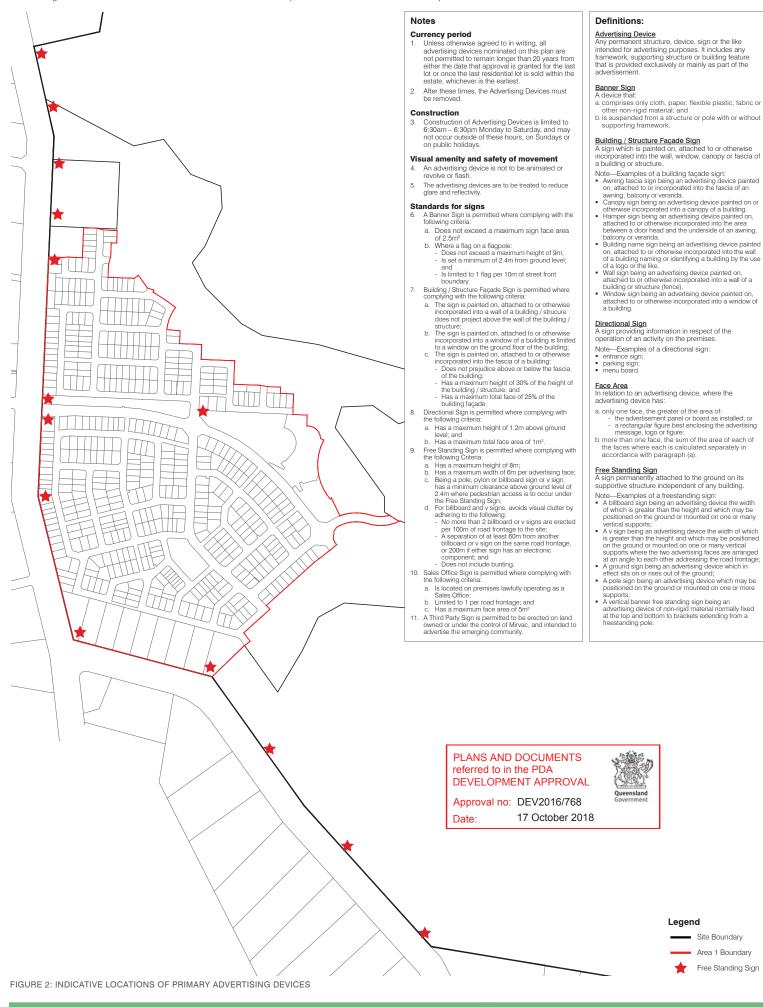

Annexure C Fence Types

# **NEIGHBOUR FENCE**

# NEIGHBOUR FENCE TYPE 1 — TIMBER PALING FENCE

# . HOT TIP!

Retaining walls to be constructed by Mirvac have been designed to allow these fences to be attached using cleats. Speak to the Sales Team or refer to the Building @ Everleigh Portal for further detail.

### **FINISHES**


- · Timber paling fence
- Unpainted
- Pine palings
- Posts and rails to be hardwood, recommended grade F14, durability Class 1
- Any timber in contact with ground to be H4treated minimum



#### **FENCE TYPE 1 EXAMPLE**



#### Front view

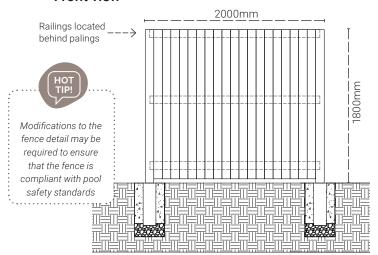

#### Side view

# 

#### Plan view

on correct fence footings detail.

# Specifications:

#### Posts

- Spacing nominal 2m
- Corner posts/End posts 100x100
- Intermediate posts 100x75
- Height 1.8m above finished level

#### Rails

- · 3 required
- 90 x 40

#### Palings

- 100x16
- Nominal 0mm gap between palings

# **FEATURE FENCE**

### FEATURE FENCE TYPE A — DRESSED HARDWOOD VERTICAL BATTENS




Retaining walls to be constructed by Mirvac have been designed to allow these fences to be attached using cleats. Speak to the Sales Team or refer to the Building @ Everleigh Portal for further detail.

#### **FINISHES**


- All timber to be hardwood, recommended grade F14, durability Class 1
- Any timber in contact with ground to be H4 treated minimum
- Vertical battens to be dressed all round
- 2 coats of intergrain ultradeck (natural) minimum standard




#### **FENCE TYPE A EXAMPLE**

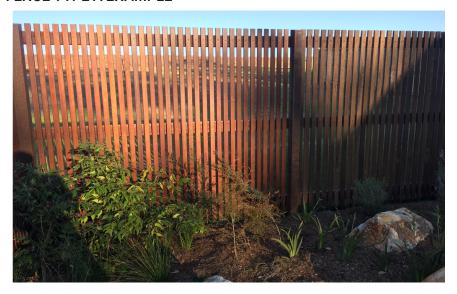

#### **Front View**

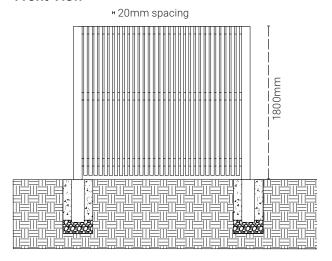

Side view

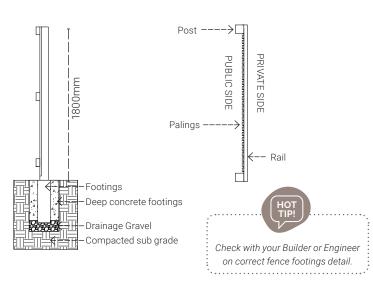

#### Plan view

#### Specifications:

#### Posts

- Spacing nominal 1.5 metres
- Corner posts/End posts 100x100
- Intermediate posts 100x75
- · Height 1.8m above finished level

#### Rails

- 3 required
- 90 x 40

#### Palings

- 20 x 40
- 20mm gap (minimum) between palings

# **FEATURE FENCE**

### FEATURE FENCE TYPE B — ROUGH SAWN HARDWOOD VERTICAL BATTENS

# . HOT TIP!

Retaining walls to be constructed by Mirvac have been designed to allow these fences to be attached using cleats. Speak to the Sales Team or refer to the Building @ Everleigh Portal for further detail.

#### **FINISHES**


- All timber to be hardwood, recommended grade F14, durability Class 1
- Any timber in contact with ground to be H4 treated minimum
- Arris all exposed edges (5mm)
- Mechanical wire brush palings
- 2 coats of intergrain ultradeck (natural) minimum standard




#### **FENCE TYPE B EXAMPLE**



#### **Front View**

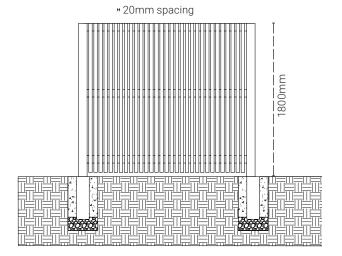

#### Side view

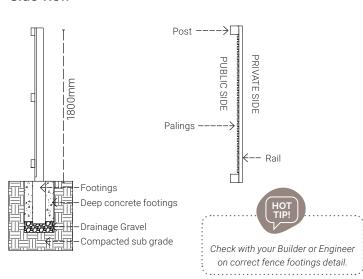

#### Plan view

# Specifications:

#### Posts

- Spacing nominal 1.5 metres
- Corner posts/End posts 100x100
- Intermediate posts 100x75
- · Height 1.8m above finished level

#### Rails

- 3 required
- 90 x 40

#### Palings

- 20 x 40
- 20mm gap (minimum) between palings

# Annexure D

Landscape Design Guidelines

# Everleigh Landscape Design Guidelines

# The following planting plans present typical garden layouts.

Plans require customisation to suit the unique site conditions.

Designs must meet requirements outlined in the Part 2: Architectural and Landscape Design Standards of the Everleigh Residential Design Standards & Guidelines.

Refer to the plant palette for recommended species list.




Be sure to seek advice from your engineer for any retaining walls or fencing requirements.

# General Landscape Design Notes


Give consideration to the following:

- Protect and enhance favourable existing views and vistas through considerate placement of trees and shrubs
- Locate trees and shrubs to provide adequate privacy between neighbours and the public realm
- Provide a balance of sun penetration, shading and wind screening
- Consider the location of windows and the mature heights of shrubs when planting around the house perimeter to preserve views into the garden and prevent overshading of the interior
- Consider service locations and potential conflicts with trees
- Provide safe and comfortable access to gates and doorways
- Ensure pathways and pavements are stable, even and non-slip in all weather conditions with adequate crossfalls to prevent ponding of water
- Do not plant spiky plants next to pathways
- Maintain adequate sightlines for drivers and pedestrians in the vicinity of driveways and ensure plants with a mature height of under 500mm are chosen for ciritical locations
- Manage site water to ensure stormwater runs off away from buildings and waterlogging is minimised
- Consider the site's aspect and predict the amount of sun and shade plants will likely receive when selecting species from the plant palette

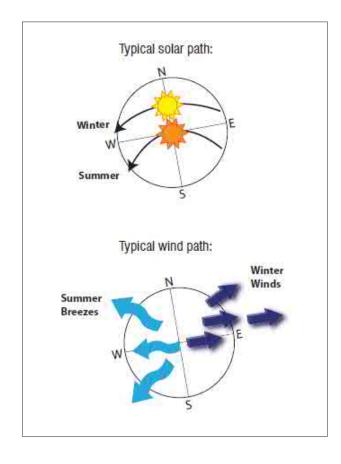




#### LANDSCAPE PLAN: TYPICAL LOT — BUILT TO BOUNDARY

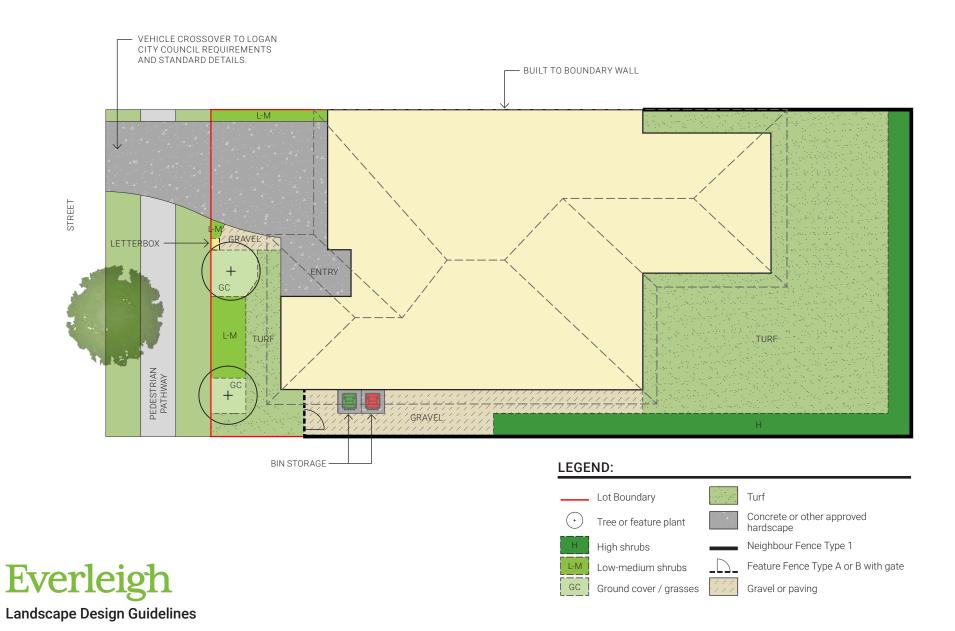

### LANDSCAPE PLAN: TYPICAL LOT — NOT BUILT TO BOUNDARY

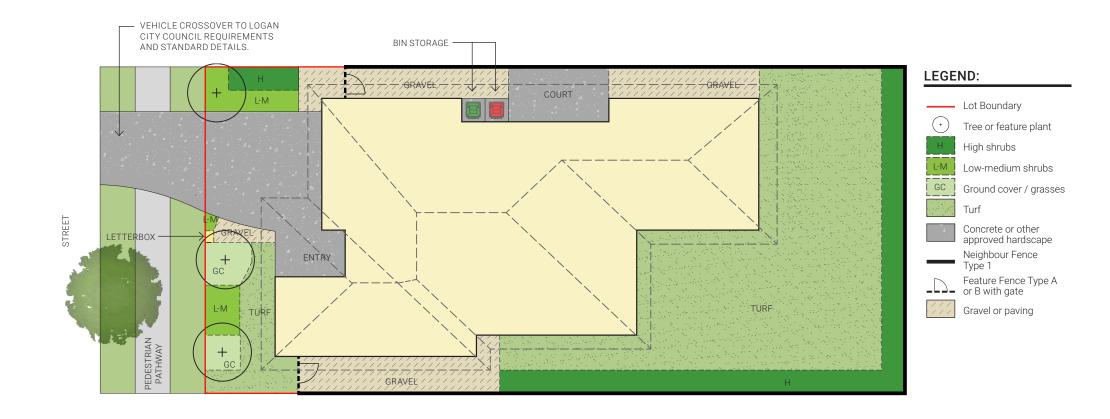



#### LANDSCAPE PLAN: TYPICAL LOT — CORNER LOT



# PROPOSED PLANTING GUIDELINE: TREES

(+)

Tree or feature plant

PLANT S	PLANT SPECIES			LIGHT	REQUIRE	MENTS	WILDLIFE ATTRACTING				ENANCE REQUIRE			FLOV	VERS		STYLE		
Scientific Name	Common Name	Height x Spread at Maturity (m)	MIN. SUPPLY SIZE	Full Sun	Part Sun	Full Shade	Birds	Butterfly	Bees/Insects	Prune for Hedge	Drought Tolerant	Moist Soil – Well Mulched	Spring	Summer	Autumn	Winter	Native	Tropical	Traditional
1 Atractocarpus fitzalanii	Native Gardenia	8m x 3m	45L	Х	Х		Х	Х	X	Х		Х	Х					Х	Х
2 Buckinghamia celsissima	Ivory Curl	8m x 3m	45L	Х	X		Х	X	X		Х			×			Х	Х	
Callistemon 'White Anzac'	Bottlebrush	0.5-1.5m x 05-3m	45L	Х	X		Х	Χ	Х				X	X			Х		
Corymbia 'Summer Red'	Flowering Gum	3-5m x 3-4m	45L	Х	X		X	X	X		×			X			×		X
5 Cupaniopsis anacardioides	Tuckeroo	5-8m X 5-7m	45L	Х	X		X				×		X		X			X	
6 Grevillea baileyana	Brown Silk Oak	5-10m x 3-4m	45L	X	X		X		X		×			×			X		
7 Grevillea 'Honey Gem'	Honey Gem	5m x 3m	45L	Х			×				×		Х			×	×		
8 Grevillea 'Robyn Gordon'	Grevillea	1-1.5m x 0.5-1.5m	45L	Х	X		X	X	Х		X		X			X	X		
9 Lophostemon confertus	Queensland Brush Box	10-25m x 5-15m	45L				X	Х	Х		X		Х	×			X		X
10 Michelia figo	Port Wine Magnolia	2.5m x 1.5m	45L	Х	X					X	X	X	Х	×				X	X
Magnolia grandiflora 'Little Gem'	Magnolia 'Little Gem'	4-5m x 2-3m	45L	X	X		×		X			X		X	Х				×
Melaleuca bracteata	Honey Myrtle	3-4m x 1.5-2m	45L	Х	X		×	X	Χ		×			X			×		X
Melaleuca leucadendra	Weeping Paperbark	10-14m x 8-10m	45L	Х			Х				Х		Х	Х			Х		
Peltophorum pterocarpum	Yellow Poinciana	8-15m x 5-10m	45L	Х	Х			Х	Χ		Х		Х	Х					×
15 Tristaniopsis laurina	Water Gum	5-8m x 5-10m	45L	Х			Х	Х	X		Х		Х	Х					Х
Waterhousea floribunda	Weeping Lilli Pilli	4-5m X 2-3m	45L	х	Х		Х			Х				Х					X



# PLANTING PALETTE: TREES



# PROPOSED PLANTING GUIDELINE: FEATURE PLANTS (INCLUDING VINES & CLIMBERS)

(+)

Tree or feature plant

	PLANT SPECIES		SIZE		LIGHT	REQUIRE	MENTS	WILDLI	FE ATTRA	ACTING	MAINTENANCE TIPS & WATER REQUIREMENTS			FLOWERS				STYLE		
	Scientific Name	Common Name	Height x Spread at Maturity (m)	MIN. SUPPLY SIZE	Full Sun	Part Sun	Full Shade	Birds	Butterfly	Bees/Insects	Prune for Hedge	Drought Tolerant	Moist Soil – Well Mulched	Spring	Summer	Autumn	Winter	Native	Tropical	Traditional
1	Alcantarea extensa	White Empress	1.5m x 1.5M	140mm	Х	Х						Х	Х						Х	
2	Doryanthes excelsa	Gymea lily	2-4m x 2-3m	140mm	Х			Х	Х	Х		Х		Х	Х				Χ	Х
3	Furcraea Foetida 'Variegata'	Mauritius Hemp	1.2-1.5m x 1-1.8m	140mm	X	×						X	Х						Χ	
4	Pandorea jasminoides	Bower Vine	To 5m	140mm	X	X						Х	Х					X		Х
5	Trachelospermum jasminoides	Star Jasmine	5m - 7m	140mm	Х	X			X	X		X		Х	Х			Х	Χ	Х
6	Yucca elephantipes	Soft Tipped Yucca	2m x 15m	140mm	X	X						Х		X	Х				Χ	Х
7	Zamia furfuracea	Cardboard Palm	1m x 1.5-2m	140mm	Х	Х						Х							X	



# PLANTING PALETTE: FEATURE PLANTS (INCLUDING VINES & CLIMBERS)






# Everleigh

Landscape Design Guidelines

# PROPOSED PLANTING GUIDELINE: LARGE SCREENING PLANTS & HEDGING SHRUBS



	PLANT SPECIES		SIZE	ZE		REQUIRE	MENTS	WILDLI	FE ATTRA	ACTING		ENANCE REQUIRE			FLOV	/ERS	STYLE			
	Scientific Name	Common Name	Height x Spread at Maturity (m)	MIN. SUPPLY SIZE	Full Sun	Part Sun	Full Shade	Birds	Butterfly	Bees/Insects	Prune for Hedge	Drought Tolerant	Moist Soil – Well Mulched	Spring	Summer	Autumn	Winter	Native	Tropical	Traditional
1	Banksia integrifolia	Coastal Banksia	4-15m x 1-6m	140mm	Χ	Х		Χ						Х		Х	Χ	X		
2	Callistemon 'Captain Cook'	Bottlebrush Captain Cook	2m x 1.5m	140mm														Χ		
3	Callistemon viminalis	Weeping Bottlebrush	5-8m x 3-4m	140mm	Χ	X		Χ						X	Χ			Х		
4	Metrosideros thomasii	New Zealand Christmas Bush	4m x 2m	140mm	Х			Х	Х	Х	Х	Х		Х	Х			Х		Х
5	Syzygium 'Resilience'	Lilly Pilly Resilience	5m x 2m	140mm	Х	Х		Χ	X	X	Х		Х	Х				Х		Х



# PLANTING PALETTE: LARGE SCREENING PLANTS & HEDGING SHRUBS





# PROPOSED PLANTING GUIDELINE: MEDIUM SCREENING PLANTS & HEDGING SHRUBS

L-M Low-medium shrubs

	PLANT SPECIES SIZE		SIZE		LIGHT REQUIREMENTS			WILDLIFE ATTRACTING			MAINTENANCE TIPS & WATER REQUIREMENTS			FLOWERS				STYLE		
	Scientific Name	Common Name	Height x Spread at Maturity (m)	MIN. SUPPLY SIZE	Full Sun	Part Sun	Full Shade	Birds	Butterfly	Bees/Insects	Prune for Hedge	Drought Tolerant	Moist Soil – Well Mulched	Spring	Summer	Autumn	Winter	Native	Tropical	Traditional
1	Alpinia caerulea	Native Ginger	1.5m x 1m	140mm		X		Х					Х		X			Х		
2	Babingtonia virgata	Heath Myrtle	2-4m x 2-3m	140mm	Х	X		X	Х	Х					Х					Х
3	Banksia robur	Swamp Banksia	2 x 2m	140mm	X			X	X	X			X			X		X		
4	Grevillea rosmarinifolia	Rosemary Grevillea	2m x 2m	140mm	Х	Х		X				Х		X			Х	Х		
5	Leptospermum 'Cardwell'	Cardwell	2m x 1.5m	140mm	X			Х	X	Х		X	X	X			Х	Х		Х
6	Melaleuca 'Claret Tops'	Claret Tops	1.5m x 1m	140mm	Х							Х						Х		Х
7	Strelitzia reginae	Bird of Paradise	1-2m x 1.5m	140mm	X							X		X	X	X	X		X	Х
8	Westringia 'Wynyabbie Gem'	Native Rosemary	1.5m x 1.5m	140mm	Х	Х			Х	X	Х	Х		Х				Х		Х
9	Westringia 'Zena'	Native Rosemary	1m x 1m	140mm	Х	Х			Х	X	Х	Х		Х				Х		Х
10	Xerochrysum bracteatum	Everlasting Daisy	0.2-0.5m x 0.2-0.5m	140mm	Х	Х			Х	X		Х		Х	Х	Х		Х		Х



### PLANTING PALETTE: MEDIUM SCREENING PLANTS & HEDGING SHRUBS



# Everleigh

Landscape Design Guidelines

# PROPOSED PLANTING GUIDELINE: LOW SCREENING PLANTS & HEDGING SHRUBS

L-M Low-medium shrubs

	PLANT SPECIES		SIZE		LIGHT REQUIREMENTS				WILDLIFE ATTRACTING			MAINTENANCE TIPS & WATER REQUIREMENTS			FLOWERS				STYLE		
	Scientific Name	Common Name	Height x Spread at Maturity (m)	MIN. SUPPLY SIZE	Full Sun	PartSun	Full Shade	Birds	Butterfly	Bees/Insects	Prune for Hedge	Drought Tolerant	Moist Soil – Well Mulched	Spring	Summer	Autumn	Winter	Native	Tropical	Traditional	
1	Baeckea virgata 'La Petite'	La Petite	1m x 1m	140mm	Х	Х			Χ	Х	Х		Х		Х			Х		X	
2	Callistemon 'Little John'	Little John	1 x 1m	140mm	×			X				X			Х	Χ		X		X	
3	Myoporum ellipticum	Coastal Myoporum	0.5m x 2m	140mm	×	X						Х		Χ	Х			Х		X	
4	Philodendron 'Xanadu'	Xanadu	0.75m x 1m	140mm	X	Х							Х						Х		
5	Westringia fruticosa	Coastal Rosemary	2m x 4m	140mm	Х	Х		Χ	Χ	X	Х	X		Х	Х			Х		Х	



# PLANTING PALETTE: LOW SCREENING PLANTS & HEDGING SHRUBS





# PROPOSED PLANTING GUIDELINE: GRASSES AND GROUNDCOVER

GC Ground cover / grasses

	PLANT SPECIES SIZE		SIZE		LIGHT	REQUIRE	MENTS	WILDLI	FE ATTRA	ACTING		ENANCE REQUIRE		FLOWERS				STYLE		
	Scientific Name	Common Name	Height x Spread at Maturity (m)	MIN. SUPPLY SIZE	Full Sun	Part Sun	Full Shade	Birds	Butterfly	Bees/Insects	Prune for Hedge	Drought Tolerant	Moist Soil – Well Mulched	Spring	Summer	Autumn	Winter	Native	Tropical	Traditional
1	Brachyscome multifida	Cut Leaf Daisy	0.5m x 0.8m	140mm	Х	X			Х	Х		X		Х	Х			Х		Х
2	Casuarina 'Cousin It'	Cousin It	0.15-0.3 x 1.5-3m	140mm	Х	Х						Х		Х	Х					
	Chrysocephalum apiculatum	Everlasting Buttons	0.3 x 0.5-3m	140mm	X	Х		X	Х	X										
4	Cordyline fruticosa 'Pink Diamond'	Cordyline Pink Diamond	2-3m x 1m	140mm	Х	Х						Х	Х						Х	
5	Dietes bicolor	Wild Iris	1 x 1m	140mm	X							×		Χ	X					X
6	Dietes grandiflora	Wild Iris	1 x 1m	140mm	X							×		Χ	X					X
7	Gazania rigens	Gazania	0.3 – 0.5m	140mm	X							×		Χ	Х			Х		X
	Grevillea 'Poorinda Royal Mantle'	Grevillea	0.1-0.2m x 3-8m	140mm	Х	Х		Х	Х	Х								Х		
9	Liriope muscari 'Evergreen Giant'	Liriope Evergreen Giant	0.75 x 0.3m	140mm	Х							X			Х	X			Χ	Х
10	Lomandra hystrix	Slender Mat Rush	1.5m x 1.5m	140mm	X							Х		Х	Х			Х		
11	Myoporum parvifolium	Creeping Boobialla	0.1-0.5m x 1-3m	140mm	Х	Х						Х		Χ	Х			Х		
	Russelia equisetiformis	Coral Plant	1m x 4m	140mm	Х	Х		Х	Х			Х							Х	
13	Viola hederacea	Native Violet	0.15 x 0.2m	140mm		Х	Х					Х	Х	Χ				Х	Χ	X



# PLANTING PALETTE: GRASSES AND GROUNDCOVER



# Everleigh

Residential Design Standards and Guidelines Precinct 1.3

#### REVISIONS SCHEDULE

 REVISION
 DATE
 CHANGES MADE

 A
 20.02.2019
 First Copy