



Everleigh



2093
RL 60.90

2092
RL 60.50

2091
RL 60.35

Tiered Retaining Wall at Corner
Lot 2105 is 2.85m below Lot 2093.

Retaining Wall on Boundary
Max Height : 1.45m
Min Height : 1.45m
Average Height : 1.45m

Tiered Retaining Wall at Corner
Lot 2105 is 2.30m below Lot 2091.

Retaining Wall on Boundary
Max Height : 0.90m
Min Height : 0.90m
Average Height : 0.90m

Retaining Wall In Lot 2105
Max Height : 1.00m
Min Height : 1.00m
Average Height : 1.00m

Retaining Wall on Boundary
Max Height : 0.80m
Min Height : 0.80m
Average Height : 0.80m

2104
RL 58.95

2105
420 m²
RL 58.15

2106
RL 57.45

Retaining Wall on Boundary
(Front of Lot Transition)
Max Height : 0.90m
Min Height : 0.00m
Average Height : 0.45m

Retaining Wall on Boundary
(Front of Lot Transition)
Max Height : 0.80m
Min Height : 0.00m
Average Height : 0.40m



APPLE AVENUE

LEGEND

- Area of Fill
- Area of Cut
- Design Contours
- Depth of Fill Contours
- Retaining Wall
- Tiered Retaining Wall
- Earthworks Pad
- RL XX.XX Finished Pad Design Level
- XX.XX Finished Surface Design Level

(Not all items in this legend may be relevant to the lot shown hereon)

SCALE @A3 1:200 - LENGTHS ARE IN METRES

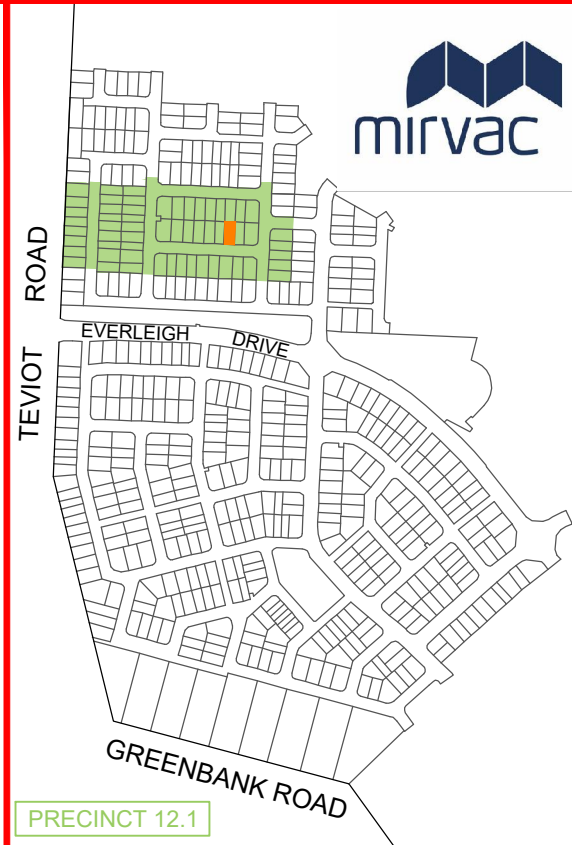

PRECINCT 12.1

NOTES

This plan has been prepared from preliminary survey plan (SP323156) and engineering plans provided on the 23/11/2020 by Premise Engineering Pty Ltd.

Development approval was granted for this subdivision (DEV2016/768/45) by the Minister for Economic Development Queensland (10/07/20).

The relevant authorities have granted operational works approval for the proposed lot.

The purchaser should refer to the applicable development approvals for building and/or other requirements that may be applicable to the lot.

All fill shall be placed and compacted in a controlled manner so that Level 1 level of responsibility may be achieved and certified as per AS3798-2007.

Extent of retaining walls shown indicatively only. Retaining walls may not extend the full length of a lot boundary where finished level between allotments is less than 0.5m.

Fill placed between proposed tiered retaining walls will generally be equal to the height of the top of the bottom retaining wall.

No.	by	Date	Chkd	Description
A	TBG	16/12/20	CU	Original Issue



Saunders Havill Group Pty Ltd ABN 24 144 972 949
Brisbane Springfield Rockhampton
head office 9 Thompson St Bowen Hills Q 4006
phone 1300 123 5HG web www.saundershavill.com

■ surveying ■ town planning ■ urban design ■ environmental management ■ landscape architecture

This Disclosure Plan is prepared for the sole purpose of satisfying the disclosure requirements of the Land Sales Act and SHOULD NOT be used for any other purpose, particularly as-constructed purposes. This information is compiled from design plans only, unless otherwise stated, and therefore is subject to final survey and construction of operational works.

Disclosure Plan for Proposed Lot 2105 on SP323156

Described as part of Lot 9003 on SP317644
Existing Title Reference: 51221827

Locality of Greenbank (Logan City Council)

Level Datum: AHD der.
Origin of Levels: PSM 203673
RL of Origin: 54.070
Contour Interval: 0.25m

Scale @A3 1:200
Dwg No. 7598 S 35 DP A_2105