



Everleigh

3299
RL 47.20

Retaining Wall on Boundary
Max Height: 0.85m
Min Height: 0.85m
Average Height: 0.85m

3280
RL 47.85


Retaining Wall at Corner
Lot 3277 is 1.5m below
Lot 3280.

3277
300 m²
RL 46.45

3278
RL 46.45

3276
RL 46.45

- LEGEND**
- Area of Fill
 - Area of Cut
 - Design Contours
 - Depth of Fill Contours
 - Retaining Wall
 - Tiered Retaining Wall
 - Earthworks Pad
 - Finished Pad Design Level
 - Finished Surface Design Level
- (Not all items in this legend may be relevant to the lot shown hereon)



This Disclosure Plan is prepared for the sole purpose of satisfying the disclosure requirements of the Land Sales Act and SHOULD NOT be used for any other purpose, particularly as-constructed purposes. This information is compiled from design plans only, unless otherwise stated, and therefore is subject to final survey and construction of operational works.

Saunders Havill Group Pty Ltd ABN 24 144 972 949
Brisbane # Springfield # Rockhampton
head office 9 Thompson St Bowen Hills Q 4006
phone 1800 123 516 web www.saundershavill.com


SH saunders havill group
surveying # town planning # urban design # environmental management # landscape architecture

Disclosure Plan for Proposed Lot 3277 on SP334746
Described as part of Lot 9002 on SP338104
Existing Title Reference: 51310819
Locality of Greenbank (Logan City Council)

Level Datum: AHD der.
Origin of Levels: PSM 203673
RL of Origin: 54.070
Contour Interval: 0.25m
Scale @A3 1: 200
Dwg No. 7598 S 54 DP A_3277

No.	by	Date	Chkd	Description
A	MS	31/03/23	LMP	Original Issue
Issues				

PRECINCT 9.6

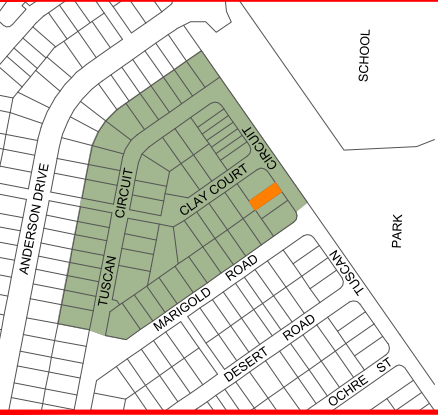

NOTES

This plan has been prepared from preliminary survey plan (SP334746) and engineering plans provided on the 06/02/2023 by Premise Civil Engineering Pty Ltd.

Development approval was granted for this subdivision (DEV2020/1160) by the Minister for Economic Development Queensland on 26th of August 2021.

The relevant authorities have granted operational works approval for the proposed lot.

The purchaser should refer to the applicable development approvals for building and/or other requirements that may be applicable to the lot.

All fill shall be placed and compacted in a controlled manner so that Level 1 level of responsibility may be achieved and certified as per AS3798-2007.

Extent of retaining walls shown indicatively only. Retaining walls may not extend the full length of a lot boundary where finished level between allotments is less than 0.5m.