



**Everleigh**



**PRECINCT 10.1**

**NOTES**

This plan has been prepared from preliminary survey plan (SP344891) and engineering plans provided on the 26/09/2023 by Premise Civil Engineering Pty Ltd.

Development approval was granted for this subdivision (DEV2022/1277) by the Minister for Economic Development Queensland on 11th of November 2022.

The relevant authorities have granted operational works approval for the proposed lot.


The purchaser should refer to the applicable development approvals for building and/or other requirements that may be applicable to the lot.

Extent of retaining walls shown indicatively only. Retaining walls may not extend the full length of a lot boundary where finished level between allotments is less than 0.5m.

Parts of this lot may be subject to rip and re-compact earthwork procedures as determined by site conditions. This process may be completed in cut locations to assist the house pad construction. Any re-compaction will comply with AS3798 requirements and be certified by a third party company.

All fill shall be placed and compacted in a controlled manner so that Level 1 level or responsibility may be achieved and certified as per AS3798-2007.

No.	by	Date	Chkd	Description
A	MS	11/10/23	PS	Original Issue
Issues				

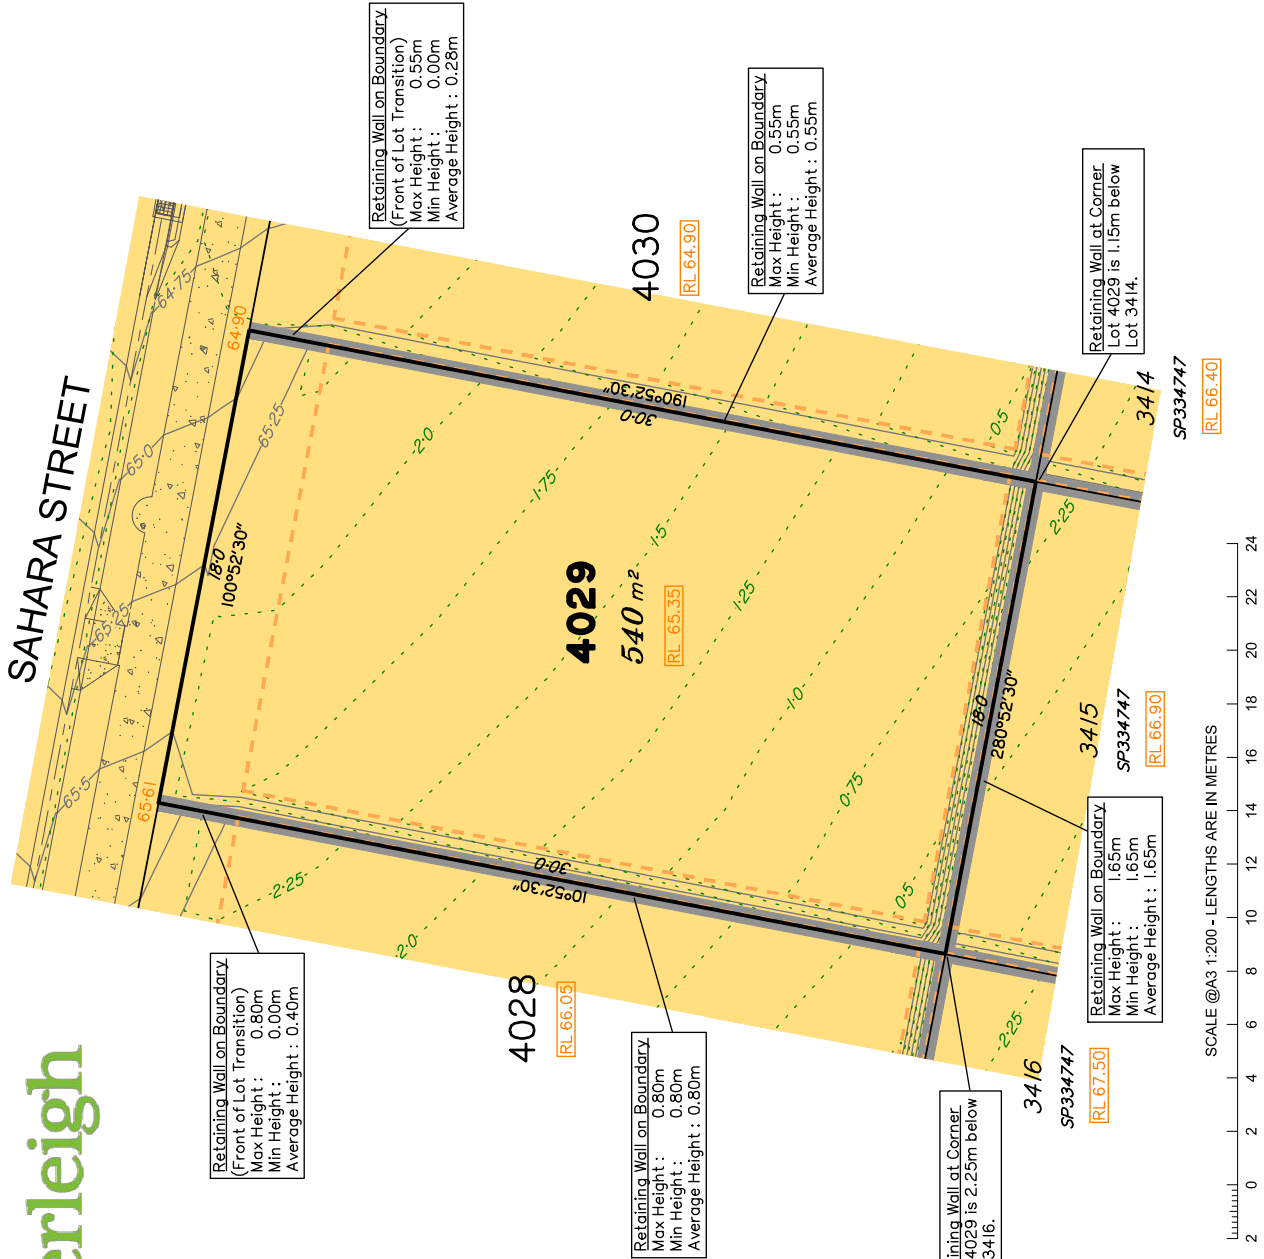

**Retaining Wall on Boundary (Front of Lot Transition)**  
 Max Height : 0.80m  
 Min Height : 0.00m  
 Average Height : 0.40m

**Retaining Wall on Boundary**  
 Max Height : 0.80m  
 Min Height : 0.80m  
 Average Height : 0.80m

**Retaining Wall on Boundary (Front of Lot Transition)**  
 Max Height : 0.55m  
 Min Height : 0.00m  
 Average Height : 0.28m

**Retaining Wall on Boundary**  
 Max Height : 0.55m  
 Min Height : 0.55m  
 Average Height : 0.55m

**Retaining Wall at Corner.**  
 Lot 4029 is 2.25m below Lot 3416.

**Retaining Wall on Boundary**  
 Max Height : 1.65m  
 Min Height : 1.65m  
 Average Height : 1.65m

**Retaining Wall at Corner.**  
 Lot 4029 is 1.15m below Lot 3414.

- LEGEND**
- Area of Fill
  - Area of Cut
  - Design Contours
  - Depth of Fill Contours
  - Retaining Wall
  - Tiered Retaining Wall
  - Earthworks Pad
  - Finished Pad Design Level
  - Finished Surface Design Level
- (Not all items in this legend may be relevant to the lot shown hereon)



This Disclosure Plan is prepared for the sole purpose of satisfying the disclosure requirements of the Land Sales Act and SHOULD NOT be used for any other purpose, particularly as-constructed purposes. This information is compiled from design plans only, unless otherwise stated, and therefore is subject to final survey and construction of operational works.

Saunders Havill Group Pty Ltd ABN 24 144 972 949  
 Brisbane # Springfield  
 head office 9 Thompson St Bowen Hills Q 4006  
 phone 1800 123 516 web www.saundershavill.com

**saunders havill group**  
 # surveying # town planning # urban design # environmental management # landscape architecture

**Disclosure Plan for Proposed Lot 4029 on SP344891**  
 Described as part of Lot 9003 on SP334746  
 Existing Title Reference: 51326509

Locality of Greenbank (Logan City Council)

Level Datum: AHD der.  
 Origin of Levels: PSM 203673  
 RL of Origin: 54.070  
 Contour Interval: 0.25m  
 Scale @A3: 1:200  
 Dwg No. 7598 S 60 DP A\_4029